



► PREFERRED CUSTOMER EDITION

MAGAZINE

FALL 2023

New Specialized Lubricants Engineered for What You Drive and How You Drive It



New AMSOIL 100% Synthetic Hybrid Motor Oil | PAGE 4
Two New Viscosities Join Synthetic European Motor Oil Line | PAGE 6
New AMSOIL 100% Synthetic High-Mileage Motor Oil | PAGE 8
New AMSOIL Extended Life 100% Synthetic Motor Oil | PAGE 10

Order at AMSOIL



STAFF

Editor

Terry Johnsen

Associate Editor

Joel Youngman

Staff Writers

David Hilgendorf

Brad Nelson

Jamie Trembath

Joel Youngman

Graphic Design Manager

Jeff Spry

Senior Graphic Designer

Luke Boynton

Content Contribution

Keith Montgomery

Alex Thompson

Editorial Contribution

Alex Thompson

Back Issues

Back issues of *AMSOIL Magazine* are available for \$1 each. Order G17PC and specify the month and year.

On the Web

AMSOIL.com

AMSOIL.ca

Chairman & CEO

Alan Amatuzio

President

Bhadresh Sutaria

© 2023, AMSOIL INC.

All rights reserved.

Printed by Arrowhead Printing

Duluth, MN USA.

Testimonials

AMSOIL INC.

Communications Department

The AMSOIL Building

925 Tower Ave.

Superior, WI 54880

testimonials@AMSOIL.com

PROTECTION AND DEPENDABILITY

Keep your firearms in top working condition with AMSOIL Synthetic Firearm Lubricant and AMSOIL Firearm Cleaner.

AMSOIL SYNTHETIC FIREARM LUBRICANT

- **Keeps** firearms working properly for generations
- **Helps** prevent blockage, jams and wear
- **Outstanding** protection in hot and cold climates

AMSOIL FIREARM CLEANER

- **Effectively** cleans fouling and powder residue
- **Helps** reduce misfires and increase reliability
- **Protects** against corrosion



Online Store: AMSOIL.com AMSOIL.ca | Telephone: 1-800-777-7094

Shop by year, make, model

TABLE OF CONTENTS - PRODUCTS

Gasoline Motor Oil	14
European Motor Oil	18
Classic/Collector Car Motor Oil	20
Racing Oil	22
Diesel Oil	24
Transmission Fluid	26
Gear Lube	28
Fuel Additives	30
Filters	32
Grease	33
ATV/UTV Oil	34
Motorcycle Oil	36
Dirt Bike Oil	38
4-Stroke Oil	39
2-Stroke Oil	40
Marine Oil	42
Cleaners and Protectants	44
Miscellaneous	46

PREFERRED CUSTOMER EDITION

FALL 2023

FEATURES

- 4 New AMSOIL 100% Synthetic Hybrid Motor Oil: Advanced Protection for Hybrid Vehicles
- 8 New AMSOIL 100% Synthetic High-Mileage Motor Oil: Engineered for Vehicles with Over 75,000 Miles
- 10 New AMSOIL Extended-Life 100% Synthetic Motor Oil: Enhanced Protection for Peace of Mind and Convenience
- 12 Service Marine Lower Units to Prevent Water Damage

DEPARTMENTS

- 7 Tech Talk

ADVERTISEMENTS

- 2 Protection and Dependability
- 6 High Performance, Meet High Performance
- 13 What's the Right Motor Oil for You?
- 48 Look Under the Hood of Preferred Customer Membership with Your MyRewards Page



THE COVER

AMSOIL offers three new lines of specialized motor oil and two new European Motor Oil viscosities designed for what you drive and how you drive.

*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



NEW AMSOIL 100% SYNTHETIC HYBRID MOTOR OIL

Advanced Protection for Hybrid Vehicles

Increasingly more people are turning to hybrid vehicles to reduce their environmental impact and save money on fuel costs. Most hybrid SUVs top 35 mpg, while most hybrid sedans exceed 45 mpg. That's about 40% better than non-hybrids. While their popularity still lags behind traditional internal-combustion (ICE) vehicles in the U.S., hybrids accounted for 4.4% of U.S. new-car sales in the second quarter of 2022, making them a substantial and rising market segment. While hybrid vehicles offer excellent fuel efficiency, the internal-combustion engine in a hybrid vehicle endures a unique set of challenges. Infrequent engine usage and increased stop/start activity place demands on lubricants not common in

traditional ICE vehicles. New AMSOIL 100% Synthetic Hybrid Motor Oil is designed to solve those problems with purpose-built protection for the hybrid-drive cycle, maximizing hybrid-engine life, efficiency and performance.

Combats corrosion and water contamination

Hybrid engines operate intermittently, making them especially vulnerable to corrosion. Infrequent use and reduced loading of the ICE leads to lower engine temperatures that do not completely evaporate condensation, leading to rust, wear and decreased efficiency. AMSOIL 100% Synthetic Hybrid Motor Oil is formulated with a boosted dose of inhibitors to help prevent condensation-

related corrosion and maintain optimal engine performance, while its elevated level of dispersants effectively manage water that enters through condensation.

Protects against fuel dilution

Frequent stop/start activity can lead to cooler cylinders and incomplete combustion, increasing the likelihood of unburnt fuel leaking down the cylinder walls into the crankcase and contaminating the motor oil – reducing its ability to provide proper lubrication. AMSOIL 100% Synthetic Hybrid Motor Oil is engineered with a robust viscosity to cling to cylinder walls and combat the negative effects of fuel dilution.



KEY PRODUCT ATTRIBUTES

- **Protects** for up to 15,000 miles (24,000 km) or one year, whichever comes first.
- **Purpose built** to combat issues common to HEV and PHEV vehicles.
- **100% synthetic** formulation helps maximize fuel economy.
- **Corrosion inhibitors** fight corrosion caused by condensation and fuel dilution.
- **Flows** quickly to reach critical components when engine engages.
- **Helps** keep combustion chamber and exhaust system clean.
- **API licensed.**

Helps viscosity control

Infrequent use of a hybrid's engine means oil must flow quickly to reach components when the engine engages, especially at higher RPM. AMSOIL 100% Synthetic Hybrid Motor Oil is formulated to provide optimal low-temperature viscosity control to ensure rapid protection of components at startup.

Applications

AMSOIL 100% Synthetic Hybrid Motor Oil is an excellent choice for any hybrid electric (HEV) or plug-in hybrid electric vehicle (PHEV), regardless of mileage or age of the vehicle.

AMSOIL 100% Synthetic Hybrid Motor Oil

U.S. PRICING

0W-16	Units	Pkg./Size	U.S. P.C.
Stock #			
HE016QT	EA	1 Quart	8.99
HE016QT	CA	12 Quarts	102.05
0W-20			
HE020QT	EA	1 Quart	8.99
HE020QT	CA	12 Quarts	102.05

CAN. PRICING

0W-16	Units	Pkg./Size	Can. P.C.
Stock #			
HE016QTC	EA	(1) 946-ml Bottle	12.09
HE016QTC	CA	(12) 946-ml Bottles	136.75
0W-20			
HE020QTC	EA	(1) 946-ml Bottle	12.09
HE020QTC	CA	(12) 946-ml Bottles	136.75



High Performance, Meet High Performance

The AMSOIL 100% Synthetic European Motor Oil line has expanded to include 0W-30 and 10W-60 viscosities.

AMSOIL 0W-30 MS Synthetic European Motor Oil (EOT)

Proprietary formula designed for the unique demands of gasoline, diesel and hybrid European vehicles. Precise blend of advanced synthetic base oils and premium additives deliver exceptional engine protection without harming emissions systems.

AMSOIL 10W-60 FS Synthetic European Motor Oil (ETS)

Engineered for high-performance European vehicles. Precise blend of advanced synthetic base oils and premium additives deliver exceptional protection in extreme conditions. Provides excellent shear resistance, reduced oil consumption and reliable performance to confidently push engines to the limit.





Alex Thompson | MARKET MANAGER – AUTOMOTIVE B2C

The Unique Lubrication Requirements of Hybrid Engines

New AMSOIL 100% Synthetic Hybrid Motor Oil is specifically engineered to address these challenges.

Hybrid vehicles are designed to improve fuel efficiency and reduce emissions. They combine an internal combustion engine powered by traditional fuels with an electric motor powered by batteries. Most often, the electric motor is used to propel the vehicle from stops and for low-speed driving, and the gasoline engine takes over powering the vehicle at higher speeds and recharges the batteries.

This is no guarantee, but hybrids are projected to comprise 18% of cars on the road by 2035, and roughly half of all hybrid owners identify as automotive enthusiasts, the kind of drivers who focus on maintaining their own vehicles to not only maximize safety and reliability and save money, but because they don't trust anyone else to do the job.

Hybrid Challenges

Hybrid vehicles endure a unique set of challenges due to frequent starting and stopping of the engine. Intermittent operation of combustion engines makes them especially vulnerable to corrosion and wear. The infrequent use leads to lower engine temperatures that cannot evaporate condensation inside the engine. Cooler cylinders can also cause incomplete combustion, increasing the likelihood of unburnt fuel leaking into the crankcase and contaminating the motor oil. This combination of water and fuel leads to reduced oil viscosity and increased wear to bearings, cams and cylinders.

Motor oil needs to flow quickly to critical components every time the engine engages, which is problematic when the engine is constantly cold due to being off. The engine is also required to engage quickly to assist the electric motor during high load, and must instantly reach higher rpm. The engine must crank quickly to start under these conditions, and the oil must flow even quicker to provide proper engine protection.

Hybrid Solution

AMSOIL 100% Synthetic Hybrid Motor Oil is specifically engineered to address the unique demands of hybrid electric (HEV) and plug-in hybrid electric (PHEV) engines with a boosted dose of additives specifically designed to reduce condensation-related corrosion and maintain optimal engine performance. Its robust viscosity combats the negative effects of fuel dilution and maintains an optimal oil flow to key engine components at low temperatures, ensuring rapid protection of components at startup. It is a premium upgrade over traditional motor oils, delivering outstanding protection that extends oil drain intervals and maximizes hybrid performance, fuel economy and engine life.

AMSOIL 100% Synthetic Hybrid Motor Oil is API and ILSAC licensed and is recommended for service intervals of 15,000 miles (24,000 km) or 1 year in normal service. Follow the owner's manual for severe-service oil-change interval recommendations.

Hybrid owners who are already using other AMSOIL products can rest assured they are receiving excellent protection. AMSOIL 100% Synthetic Hybrid Motor Oil is tailored to the unique challenges presented by hybrid vehicles, making it an excellent choice for customers looking for an additional upgrade in hybrid-engine protection over AMSOIL OE Synthetic Motor Oil.

NEW AMSOIL 100% SYNTHETIC HIGH-MILEAGE MOTOR OIL

Engineered for Vehicles with Over 75,000 Miles

The average age of vehicles in the U.S. has been on the rise for the past six years, hitting a new record of 12.5 years in 2023. The trend is being driven by vehicle prices that continue to skyrocket. Pandemic supply-chain disruptions pushed vehicle prices upward, then a shortage of microprocessor chips added fuel to the trend. In the last half of 2022, purchasing a new vehicle became out of reach for many families as rising interest rates and inflation gave consumers a one-two combo. The result: Americans are choosing to keep their vehicles longer – and AMSOIL is launching a new product line to help. AMSOIL 100% Synthetic High-Mileage Motor Oil is designed specifically for the unique demands of high-mileage engines, helping extend the

life of vehicles with over 75,000 miles (120,000 km) on the odometer. It cleans and protects engines with boosted detergency and an additive package that fights oil breakdown and leaks.

Engine cleanliness

Deposits that have accumulated over time reduce engine performance and efficiency. AMSOIL High-Mileage Motor Oil provides enhanced detergency to breathe new life into dirty engines, removing deposit buildup to help restore peak performance.

Durable viscosity

Horsepower loss can occur as engines lose compression from cylinder and piston-ring wear. Maintaining a consistent fluid film helps counteract compression loss by sealing combustion chambers. AMSOIL High-Mileage Motor

Oil is formulated to maintain viscosity, even in extreme temperatures. Its highly-durable viscosity provides proper film thickness, even during extreme operation.

Oil-consumption control

AMSOIL High-Mileage Motor Oil is thermally stable across a wide range of temperatures to resist volatility and consumption.

Leak protection

Oil leaks are an inconvenience that can lead to lack of lubrication and engine failure. AMSOIL High-Mileage Motor Oil provides a boosted dose of seal conditioners to restore aging seals and help stop leaks.





KEY PRODUCT ATTRIBUTES

- **Cleans** and protects for up to 12,000 miles (19,000 km) or one year, whichever comes first.
- **Protects** against leaks.
- **Fights** deposits.
- **API** licensed.

AMSOIL 100% Synthetic High-Mileage Motor Oil

U.S. PRICING

0W-20

Stock #	Units	Pkg./Size	U.S. P.C.
HM020QT	EA	1 Quart	8.99
HM020QT	CA	12 Quarts	102.05
HM02055	EA	55-gal. Drum	1,653.15

5W-20

HM520QT	EA	1 Quart	8.99
HM520QT	CA	12 Quarts	102.05
HM52055	EA	55-gal. Drum	1,653.15

5W-30

HM530QT	EA	1 Quart	8.99
HM530QT	CA	12 Quarts	102.05
HM53055	EA	55-gal. Drum	1,653.15

10W-30

HM1030QT	EA	1 Quart	8.99
HM1030QT	CA	12 Quarts	102.05

CAN. PRICING

0W-20

Stock #	Units	Pkg./Size	Can. P.C.
HM020QTC	EA	(1) 946-ml Bottle	12.09
HM020QTC	CA	(12) 946-ml Bottles	136.75
HM02055	EA	208-litre Drum	2,216.60

5W-20

HM520QTC	EA	(1) 946-ml Bottle	12.09
HM520QTC	CA	(12) 946-ml Bottles	136.75
HM52055	EA	208-litre Drum	2,216.60

5W-30

HM530QTC	EA	(1) 946-ml Bottle	12.09
HM530QTC	CA	(12) 946-ml Bottles	136.75
HM53055	EA	208-litre Drum	2,216.60

10W-30

HM1030QTC	EA	(1) 946-ml Bottle	12.09
HM1030QTC	CA	(12) 946-ml Bottles	136.75



NEW AMSOIL EXTENDED-LIFE 100% SYNTHETIC MOTOR OIL

Enhanced Protection for Peace of Mind and Convenience

AMSOIL XL 100% Synthetic Motor Oil was already superior to most motor oil found on store shelves, but that didn't stop us from making it even better. XL has been reformulated to make it stronger for longer. The all-new AMSOIL Extended-Life 100% Synthetic Motor Oil line is overbuilt for road warriors so they can confidently drive up to 20,000 miles (32,000 km) or one year, whichever comes first, between oil changes. A proprietary combination of advanced synthetic base oils and a boosted additive package promotes cleanliness and prolonged engine life. AMSOIL Extended-Life protection delivers peace of mind and convenience far beyond most competing motor oils at a competitive price.

Resists Oil Breakdown

Extended-Life Synthetic Motor Oil maintains its fluidity (viscosity) under extreme conditions. Some oils break down and significantly increase in viscosity after extended periods of high-temperature operation. These changes can cause excessive oil consumption, engine deposits, accelerated wear and difficult cold starts. Extended-Life resists oil breakdown, ensuring protection in extreme temperatures.

Protects Pistons from Low-Speed Pre-Ignition

Extended-Life Motor Oil features unique chemistry to guard engines against the harmful effects of low-speed pre-ignition (LSPI). LSPI is the spontaneous ignition of the fuel/air mixture prior to spark-triggered ignition. Most new engines feature gasoline direct injection (GDI), often coupled with a turbocharger. These technologies heighten the

possibility of LSPI events, which can destroy pistons and connecting rods. Extended-Life Motor Oil is designed to protect engines from LSPI.

Keeps Engines Clean

Extended-Life Synthetic Motor Oil is fortified with a boosted additive package that neutralizes acids and resists sludge, corrosion and carbon deposits. The extra protection built into Extended-Life Motor Oil provides peace of mind knowing your vehicle is receiving premium protection and the convenience of extended drains.

Surpasses Industry Standards

AMSOIL is a trusted name in the automotive industry. Our motor oils far surpass the leading industry standards in protection against horsepower loss, engine wear and sludge. Extended-Life Synthetic Motor Oil allows enthusiasts to enjoy extended drains and a lower price point than our ultra-premium Signature Series Synthetic Motor Oil.





KEY PRODUCT ATTRIBUTES

- **Provides** extended drains up to 20,000 miles (32,000 km) or one year, whichever comes first.
- **Maintains** viscosity under the most extreme conditions.
- **Features** unique chemistry to protect against low-speed pre-ignition (LSPI).
- **Fortified** with boosted additive package that neutralizes acids and resists sludge, corrosion and carbon deposits.

AMSOIL Extended-Life 100% Synthetic Motor Oil

U.S. PRICING

0W-20

Stock #	Units	Pkg./Size	U.S. P.C.
XLZQT	EA	1 Quart	9.89
XLZQT	CA	12 Quarts	112.25
XLZ1G	EA	1 Gallon	38.79
XLZ1G	CA	4 Gallons	146.95

5W-20

XLMQT	EA	1 Quart	9.89
XLMQT	CA	12 Quarts	112.25
XL1G	EA	1 Gallon	38.79
XL1G	CA	4 Gallons	146.95

5W-30

XL1G	EA	1 Quart	9.89
XL1G	CA	12 Quarts	112.25
XL1G	EA	1 Gallon	38.79
XL1G	CA	4 Gallons	146.95

10W-30

XL1G	EA	1 Quart	9.89
XL1G	CA	12 Quarts	112.25
XL1G	EA	1 Gallon	38.79
XL1G	CA	4 Gallons	146.95

10W-40

XLOQT	EA	1 Quart	9.89
XLOQT	CA	12 Quarts	112.25
XLO1G	EA	1 Gallon	38.79
XLO1G	CA	4 Gallons	146.95

CAN. PRICING

0W-20

Stock #	Units	Pkg./Size	Can. P.C.
XLZQTC	EA	(1) 946-ml Bottle	13.09
XLZQTC	CA	(12) 946-ml Bottles	148.15
XLZ1GC	EA	(1) 3.78-litre Bottle	50.99
XLZ1GC	CA	(4) 3.78-litre Bottles	193.10

5W-20

XLMQTC	EA	(1) 946-ml Bottle	13.09
XLMQTC	CA	(12) 946-ml Bottles	148.15
XL1GTC	EA	(1) 3.78-litre Bottle	50.99
XL1GTC	CA	(4) 3.78-litre Bottles	193.10

5W-30

XL1GTC	EA	(1) 946-ml Bottle	13.09
XL1GTC	CA	(12) 946-ml Bottles	148.15
XL1GTC	EA	(1) 3.78-litre Bottle	50.99
XL1GTC	CA	(4) 3.78-litre Bottles	193.10

10W-30

XL1GTC	EA	(1) 946-ml Bottle	13.09
XL1GTC	CA	(12) 946-ml Bottles	148.15

AMSOIL Extended-Life 10W-40 Synthetic Motor Oil (XLO) is not available in Canada.

SERVICE MARINE LOWER UNITS TO PREVENT WATER DAMAGE

Preventing rust and other water-related problems.

Water and gear lube don't mix. Unfortunately, you can't avoid submerging your marine motor's lower unit, and your boat isn't going anywhere without the lower unit's combination of gears, bearings and other components that turn horsepower into movement.

Lower units are resilient and can last for years, provided you service them annually. However, water can breach the seals and contaminate the gear lube in the lower unit, causing various problems.

Water contamination

Water contamination is bad for several reasons:

Viscosity loss – Viscosity measures a liquid's resistance to flow or thickness. Your marine motor's lower unit is designed to use a gear lube of a specific viscosity for optimal wear protection. Water can reduce the gear lube's viscosity below what the manufacturer recommends, reducing wear protection.

Foam – A film of gear lube forms on the gear teeth it protects. This fluid film absorbs pressure and prevents metal-

to-metal contact. Water contamination, however, invites the formation of foam. As the foam bubbles travel between gear teeth, they rupture under the intense pressure, leaving nothing behind to prevent metal-to-metal contact, which leads to premature wear and potential gear damage.

Sludge – Water produces sludge, inhibiting heat transfer and increasing the lubricant temperature, which speeds chemical breakdown. The faster the lubricant breaks down, the sooner it fails to provide adequate protection, and the sooner it must be changed.


Rust – Water contamination invites rust formation on metal surfaces. Rust can flake off and circulate throughout the gear lube, where it acts like sandpaper and scours bearing and gear surfaces.

The solution

Avoiding contact with water is impossible when boating, so we've engineered AMSOIL Synthetic Marine Gear Lube (AGM) to deliver advanced protection against power loss and gear wear, even with up to 15% water contamination.¹

AMSOIL Fights Water Contamination
AMSOIL Synthetic Marine Gear Lube delivers **advanced outboard protection against power loss and gear wear**, even with up to 15% water contamination.¹

¹Based upon AMSOIL testing of AMSOIL Synthetic Marine Gear Lube 75W-90 in ASTM 3233 and ASTM D692.



What's the Right Motor Oil for You?

No matter what you drive or how you drive it, we formulate industry-leading motor oil to protect your vehicle. Use the chart below to choose the right motor oil for your ride.

Frequently Asked Questions

Why do I need AMSOIL High-Mileage Motor Oil? For engines exceeding 75,000 miles (120,000 km) with unknown maintenance history or known usage of lower-quality oil, AMSOIL High-Mileage Motor Oil provides an added boost of detergents to clean sludge and deposits. It also features a robust viscosity that provides additional wear protection, even after some wear has already occurred. Added seal conditioners extend the life of seals and help protect against drying, cracking and leaking.

When should I use AMSOIL High-Mileage Motor Oil? A good rule of thumb is to use AMSOIL High-Mileage Motor Oil at or around the time your vehicle has accumulated 75,000 miles (120,000 km). While 75,000 is not an extreme number of miles today, it is an ideal time to prepare your engine for the road ahead with an added boost of protection.

Do I need to use AMSOIL High-Mileage Motor Oil if I've already been using AMSOIL motor oil? No. If you've been consistently using AMSOIL motor oil, your engine is already operating at peak performance and has been protected against wear. However, if you've been

using AMSOIL OE and are looking for an upgrade in overall engine protection as it ages, AMSOIL High-Mileage Motor Oil is an excellent choice.

Aren't AMSOIL motor oils recommended for vehicles regardless of mileage? Correct, all AMSOIL motor oils offer outstanding performance and protection regardless of vehicle mileage. However, for those seeking targeted benefits at an affordable price, AMSOIL High-Mileage Motor Oil is the best choice for high-mileage applications. For those seeking the ultimate performance and protection regardless of miles, we still recommend Signature Series Motor Oil.

Is AMSOIL High-Mileage Motor Oil the best AMSOIL product to use in high-mileage vehicles? AMSOIL offers two excellent products that provide boosted benefits for high-mileage applications. AMSOIL High-Mileage Motor Oil focuses on the key challenges that high-mileage vehicles face at a lower price point. AMSOIL Signature Series Motor Oil does everything High-Mileage Motor Oil does, while providing industry-leading performance and protection across the board. Signature Series is the best choice regardless of vehicle mileage.

Why do I need Hybrid Motor Oil?

Hybrid engines operate under a different set of parameters and conditions that typically result in additional fuel and water contamination, leading to corrosion. AMSOIL Hybrid Motor Oil is uniquely formulated to address these specific challenges.

When should I use Hybrid Motor Oil?

AMSOIL Hybrid Motor Oil is an excellent choice for any hybrid electric (HEV) or plug-in hybrid electric vehicle (PHEV), regardless of miles or age of the vehicle.

What if I've been using another AMSOIL motor oil in my hybrid vehicle? If you've already been using AMSOIL motor oil, your engine has received excellent protection. All AMSOIL motor oils of the appropriate viscosity are compatible with hybrid technologies, but AMSOIL Hybrid Motor Oil is specially tailored to focus on the unique challenges presented by hybrid vehicles at an affordable price. If you've been using AMSOIL OE and are looking for an upgrade in hybrid-engine protection, AMSOIL Hybrid Motor Oil is an excellent choice.



	SIGNATURE SERIES	EXTENDED-LIFE (XL)	HIGH-MILEAGE	HYBRID	OE
WEAR PROTECTION	✓✓✓✓✓	✓✓✓	✓✓✓	✓✓✓	✓✓
ENGINE CLEANLINESS	✓✓✓✓✓	✓✓✓	✓✓✓✓	✓✓	✓✓
SERVICE INTERVAL	✓✓✓✓✓	✓✓✓✓	✓✓✓	✓✓✓	✓✓
EXTREME TEMP PERFORMANCE	✓✓✓✓✓	✓✓	✓✓	✓✓✓✓	✓✓
CORROSION PROTECTION	✓✓✓✓✓	✓✓✓	✓✓	✓✓✓✓	✓✓
OIL-CONSUMPTION CONTROL	✓✓✓✓✓	✓✓✓	✓✓✓	✓✓	✓✓
VISCOSITY CONTROL	✓✓✓✓✓	✓✓✓	✓✓	✓✓✓✓	✓✓
LEAK PROTECTION	✓✓✓✓✓	✓✓	✓✓✓✓	✓✓	✓✓
SEVERE-SERVICE PROTECTION	✓✓✓✓✓	✓✓✓	✓✓	✓✓	✓✓

Synthetic Gasoline Motor Oil



CARLISTE
Events



JEEP
BEACH

Signature Series Keeps Pistons Cleaner

Even after doubling the length of the industry-standard test, AMSOIL delivered **40% cleaner pistons** than required by the standard.^{FF}



^{FF}Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIH Engine Test (ASTM D6111), required by the ILSAC GF-6 and API SP specifications.

Signature Series Delivers Powerful Protection

AMSOIL delivers powerful protection. How good is it? An independent lab compared AMSOIL synthetic motor oil head-to-head against a leading competitor in a 100,000-mile (160,934-km) test^F. AMSOIL provided far superior wear protection and kept bearings looking like new.



^FTesting conducted in an independent lab using AMSOIL Signature Series 5W-30 Synthetic Motor Oil and a leading synthetic-blend 5W-30 motor oil in Ford F-150 trucks with 3.5L twin-turbo engines.



Signature Series



Signature Series Synthetic Motor Oil

Engineered for enthusiasts seeking maximum protection and performance. Precision-formulated with cutting-edge technology and a longstanding devotion to making the world's best motor oil. The result: engine protection that blows the doors off the highest industry standards. Guaranteed protection for up to 25,000 miles (40,200 km) or 1 year, whichever comes first.

● 0W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos1 Gen 2, 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C947-A, WSS-M2C947-B1, WSS-M2C962-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ASMQT	EA	1 Quart	11.89	15.29
ASMQT	CA	12 Quarts	134.75	173.45
ASM1G	EA	1 Gallon	44.29	55.89
ASM1G	CA	4 Gallons	167.85	211.85

● 5W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos1 Gen 2, LL-A-025, 6094M, 4718M) • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Ford WSS-M2C945-A, WSS-M2C930-A, WSS-M2C945-B1, WSS-M2C960-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ALMQT	EA	1 Quart	11.89	15.29
ALMQT	CA	12 Quarts	134.75	173.45
ALM1G	EA	1 Gallon	44.29	55.89
ALM1G	CA	4 Gallons	167.85	211.85

● 0W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos1 Gen 2, LL-A-025, 6094M, 4718M) • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Ford WSS-M2C963-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AZQQT	EA	1 Quart	11.89	15.29
AZQQT	CA	12 Quarts	134.75	173.45
AZO1G	EA	1 Gallon	44.29	—
AZO1G	CA	4 Gallons	167.85	—

● 5W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos1 Gen 2, LL-A-025, 6094M, 4718M) • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Honda HTO-06 • Ford WSS-M2C946-A, WSS-M2C929-A, WSS-M2C946-B1, WSS-M2C961-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ASLQT	EA	1 Quart	11.89	15.29
ASLQT	CA	12 Quarts	134.75	173.45
ASL1G	EA	1 Gallon	44.29	55.89
ASL1G	CA	4 Gallons	167.85	211.85

● 10W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Ford WSS-M2C205-A • GM LL-A-025, 6094M, 4718M

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATMQT	EA	1 Quart	11.89	15.29
ATMQT	CA	12 Quarts	134.75	173.45
ATM1G	EA	1 Gallon	44.29	—
ATM1G	CA	4 Gallons	167.85	—

● 0W-40

Use in vehicles that require API SP, SN-PLUS, SN... • Chrysler MS-12633, MS-10725, MS-10850 • Nissan GT-R • GM dexos R

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AZFQT	EA	1 Quart	11.89	15.29
AZFQT	CA	12 Quarts	134.75	173.45

○ 5W-50

Use in vehicles that require API SP, SN-PLUS, SN... • Ford WSS-M2C931-C (Mustang) • GM dexos R

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AMRQT	EA	1 Quart	11.89	15.29
AMRQT	CA	12 Quarts	134.75	173.45

Signature Series Fights Wear

AMSOIL Signature Series Synthetic Motor Oil provides **75 percent more engine protection against horsepower loss and wear** than required by a leading industry standard^A, extending the life of vital components like pistons and cams.

^ABased on independent testing of AMSOIL Signature Series 0W-20 using the ASTM D6891 standard test.

Signature Series Guards Turbos

Signature Series protects turbochargers **72% better** than required^C by the GM dexos1[®] Gen 2 specification.

^CBased on independent testing of AMSOIL Signature Series 5W-30 in the GM turbo coking test.

Signature Series Protects Against LSPI

AMSOIL synthetic motor oils achieved **100% protection against LSPI**.^B

^BBased on zero LSPI events in five consecutive tests of AMSOIL Signature Series, XL and OE 5W-30 Motor Oil in the LSPI engine test required by the GM dexos1 Gen 2 specification.

Signature Series Cleans

AMSOIL Signature Series Synthetic Motor Oil has **50% more detergents**^P to help keep oil passages clean and promote oil circulation. It provides **90% better protection** against sludge^{DD}.

^Pvs. AMSOIL OE Motor Oil
^{DD}Based on independent testing of AMSOIL Signature Series 5W-30 in the ASTM D6593 engine test for oil screen plugging as required by the API SN PLUS specification.

Signature Series Helps Keep Engines Cleaner

AMSOIL Signature Series is fortified with a heavy treatment of detergent additives, delivering **28 percent more acid-neutralizing power** than Mobil 1[®] and helping engines stay cleaner, longer.^{LL}

^{LL}Based upon independent testing of Mobil 1 Annual Protection Full Synthetic 5W-30 and AMSOIL Signature Series 5W-30 in ASTM D2896. Oils purchased July 2020. All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.

Signature Series Resists Viscosity Increase

AMSOIL is barely challenged by the industry-standard testing, demonstrating only a 0.1% viscosity increase. Even when the test length is doubled, AMSOIL **delivered twice the viscosity control** required by the standard.^{GG}

^{GG}Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIH Engine Test (ASTM D8111), required by the ILSAC GF-6 and API SP specifications.

TO ORDER: 1-800-777-7094 MONDAY – FRIDAY 7 A.M. – 7 P.M. • AMSOIL.COM

Free shipping on all orders of \$100 (\$130 CAN.) or more.

Orders below \$100 (\$130 Can.) pay a flat shipping rate of \$9.99 (\$12.99 Can.).





Extended-Life 100% Synthetic Motor Oil

Overbuilt for road warriors so you can confidently drive up to 20,000 miles (32,000 km) or one year, whichever comes first, between oil changes. A proprietary combination of advanced synthetic base oils and a boosted additive package promotes cleanliness and prolonged engine life. AMSOIL Extended-Life protection delivers peace of mind and convenience.

● 0W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos1 Gen 3 (supersedes dexos 1 Gen 2 and 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C947-A, WSS-M2C947-B1, WSS-M2C962-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
XLZQT	EA	1 Quart	9.89	13.09
XLZQT	CA	12 Quarts	112.25	148.15
XLZ1G	EA	1 Gallon	38.79	50.99
XLZ1G	CA	4 Gallons	146.95	193.10

● 5W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos1 Gen 3 (supersedes dexos 1 Gen 2 and 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C930-A, WSS-M2C945-A, WSS-M2C945-B1, WSS-M2C960-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
XLMQT	EA	1 Quart	9.89	13.09
XLMQT	CA	12 Quarts	112.25	148.15
XLM1G	EA	1 Gallon	38.79	50.99
XLM1G	CA	4 Gallons	146.95	193.10

● 5W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos1 Gen 3 (supersedes dexos 1 Gen 2, 4718M, 6094M and LL-A-025) • ACEA A1/B1, A5/B5 • Chrysler MS-6395 • Ford WSS-M2C929-A, WSS-M2C946-A, WSS-M2C946-B1, WSS-M2C961-A1 • Honda HTO-06

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
XLFQT	EA	1 Quart	9.89	13.09
XLFQT	CA	12 Quarts	112.25	148.15
XLF1G	EA	1 Gallon	38.79	50.99
XLF1G	CA	4 Gallons	146.95	193.10

● 10W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • ACEA A1/B1, A5/B5 • Chrysler MS-6395 • Ford WSS-M2C205-A • GM 4718M, 6094M

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
XLTQT	EA	1 Quart	9.89	13.09
XLTQT	CA	12 Quarts	112.25	148.15
XLT1G	EA	1 Gallon	38.79	—
XLT1G	CA	4 Gallons	146.95	—

○ 10W-40

Use in vehicles that require API SP, SN-PLUS, SN... • ACEA A3/B3, A3/B4

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
XLOQT	EA	1 Quart	9.89
XLOQT	CA	12 Quarts	112.25
XLO1G	EA	1 Gallon	38.79
XLO1G	CA	4 Gallons	146.95

OE 100% Synthetic Motor Oil

Delivers 100% synthetic engine protection for advanced automotive technology, including turbos and direct injection. Specifically formulated for the longer drain intervals recommended by original equipment (OE) manufacturers.

● 0W-16

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6B

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OESQT	EA	1 Quart	7.49	9.99
OESQT	CA	12 Quarts	84.40	112.70

● 0W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos 1 Gen 2, 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C947-A, WSS-M2C947-B1, WSS-M2C962-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OEZQT	EA	1 Quart	7.49	9.99
OEZQT	CA	12 Quarts	84.40	112.70
OEZ1G	EA	1 Gallon	29.39	38.59
OEZ1G	CA	4 Gallons	111.10	146.05

● 5W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos 1 Gen 2, 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C945-A, WSS-M2C930-A, WSS-M2C945-B1, WSS-M2C960-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OEMQT	EA	1 Quart	7.49	9.99
OEMQT	CA	12 Quarts	84.40	112.70
OEM1G	EA	1 Gallon	29.39	38.59
OEM1G	CA	4 Gallons	111.10	146.05

● 5W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • GM dexos1 Gen 3 (supersedes dexos 1 Gen 2, LL-A-025, 6094M, 4718M) • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Honda HTO-06 • Ford WSS-M2C946-A, WSS-M2C929-A, WSS-M2C946-B1, WSS-M2C961-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OEFQT	EA	1 Quart	7.49	9.99
OEFQT	CA	12 Quarts	84.40	112.70
OEF1G	EA	1 Gallon	29.39	38.59
OEF1G	CA	4 Gallons	111.10	146.05

● 10W-30

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, 4... • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Ford WSS-M2C205-A • GM 6094M, 4718M

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OETQT	EA	1 Quart	7.49	9.99
OETQT	CA	12 Quarts	84.40	112.70

OE Protects Against Wear

OE provides **47 percent more wear** protection.^g

^gBased on independent testing of OE 0W-20 in the Peugeot TU3M Wear Test as required by the dexos1 Gen 2 specification.



100% Synthetic Hybrid Motor Oil

Custom formulation designed to combat the unique challenges posed by hybrid electric vehicles (HEV) and plug-in hybrid electric vehicles (PHEV), like frequent starts and stops and fuel dilution. It flows quickly to reach critical components when the engine engages. AMSOIL Hybrid Motor Oil features a robust viscosity that protects against the harmful effects of fuel dilution. Protects for up to 15,000 miles (24,000 km) or 1 year, whichever comes first.

● 0W-16

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6B

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
HE016QT	EA	1 Quart	8.99	12.09
HE016QT	CA	12 Quarts	102.05	136.75

● 0W-20

Use in vehicles that require API SP (Resource Conserving), SN-PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos1[®] Gen 3 (supersedes dexos1 Gen 2 and 6094M) • Chrysler MS-6395 • Ford WSS-M2C962-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
HE020QT	EA	1 Quart	8.99	12.09
HE020QT	CA	12 Quarts	102.05	136.75

Oil Analyzers

AMSOIL offers oil analysis service options from Oil Analyzers Inc.[®] By analyzing used engine oil, a qualified lab can detect mechanical problems your equipment may have developed. For more information, visit www.oiltesting.com.

STOCK#	PKG./SIZE	U.S. P.C.	CAN. P.C.
KIT01	1 sample kit (includes two-way postage) - U.S.	28.35	—
KIT02	1 sample kit (includes UPS shipping) - U.S.	28.35	—
KIT06	1 sample kit - U.S.	20.50	—
KIT14	1 value sample kit - U.S.	15.70	—
KIT401	1 sample kit (includes UPS shipping) - CAN.	—	52.05
KIT402	1 sample kit - CAN.	—	32.45
G1206	Oil Suction Pump w/10-ft. hose	26.25	34.65
G1571	Replacement Hose 25-ft.	8.35	11.00

100% Synthetic High-Mileage Motor Oil

Designed specifically for the unique demands of high-mileage engines, helping extend the life of vehicles. It features a unique formulation that delivers extra detergency and a robust viscosity to clean and protect high-mileage engines with 75,000+ miles (120,000+ km). It delivers purpose-built protection at a time in a vehicle's life where it could benefit from more-robust maintenance. AMSOIL High-Mileage Motor Oil cleans and protects engines with boosted detergency and an additive package that fights oil breakdown and oil leaks. Protects for up to 12,000 miles (19,000 km) or 1 year, whichever comes first.

● 0W-20

Use in vehicles that require API SP, SN-PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos1[®] Gen 3 (supersedes dexos1 Gen 2 and 6094M) • Chrysler MS-6395 • Ford WSS-M2C947-A, WSS-M2C947-B1, WSS-M2C962-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
HM020QT	EA	1 Quart	8.99	12.09
HM020QT	CA	12 Quarts	102.05	136.75

● 5W-20

Use in vehicles that require API SP, SN-PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos1[®] Gen 3 (supersedes dexos1 Gen 2 and 6094M) • Chrysler MS-6395 • Ford WSS-M2C930-A, WSS-M2C945-A, WSS-M2C945-B1, WSS-M2C960-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
HM520QT	EA	1 Quart	8.99	12.09
HM520QT	CA	12 Quarts	102.05	136.75

● 5W-30

Use in vehicles that require API SP, SN-PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos1[®] Gen 3 (supersedes dexos1 Gen 2 and 6094M) • Chrysler MS-6395 • Ford WSS-M2C929-A, WSS-M2C946-A, WSS-M2C946-B1, WSS-M2C961-A1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
HM530QT	EA	1 Quart	8.99	12.09
HM530QT	CA	12 Quarts	102.05	136.75

● 10W-30

Use in vehicles that require API SP, SN-PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM 4718M, 6094M • Chrysler MS-6395 • Ford WSS-M2C205-A

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
HM1030QT	EA	1 Quart	8.99	12.09
HM1030QT	CA	12 Quarts	102.05	136.75

G1230

Tough-to-reach fill hole?

Order a flexible pour spout with your oil to make the job easier. Fits quarts and gallons.

PRODUCT	STOCK#	U.S. P.C.	CAN. P.C.
Flexible Pour Spout	G1230	0.80	1.05
FloTool Flexible Pour Spout	G3721	4.20	5.65



TO ORDER: 1-800-777-7094 MONDAY – FRIDAY 7 A.M. – 7 P.M. • AMSOIL.COM

Free shipping on all orders of \$100 (\$130 CAN.) or more.

Orders below \$100 (\$130 Can.) pay a flat shipping rate of \$9.99 (\$12.99 Can.).





“My engine sounds better than it ever has. My BMW* has 70,000+ miles and has never sounded this good or smooth. You can tell a lot about engines just from the sound and this baby is purring like I’ve never heard it purr. I am very pleased and glad I made the switch to AMSOIL.”

– **Tom**
Atlanta, Ga.

Synthetic European Motor Oil

Specially formulated for the lubrication needs of European gasoline and diesel cars and light trucks.

0W-20 LS-VW³¹

Use in vehicles that require API SN-PLUS, SN... • ACEA C5 • Porsche C20 • VW 508.00/509.00/TL52577

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
EZTQT	EA	1 Quart	11.59	15.49
EZTQT	CA	12 Quarts	131.15	175.35

0W-20 LS

Use in vehicles that require API SN-PLUS (Resource Conserving), SN, SM... • ILSAC GF-5, GF-4... • ACEA C5, A1/B1 • BMW LL-17FE+ • MB 229.71 • Ford WSS-M2C947-B1 • Opel/Vauxhall OV401547 • Fiat 9.55535-GSX • Chrysler MS-12145 • Volvo VCC RBS0-2AE

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AFEQT	EA	1 Quart	10.79	14.49
AFEQT	CA	12 Quarts	122.05	164.60

0W-30 MS

Use in vehicles that require API SP, SN-PLUS, SN... • ACEA C2/C3 • BMW LL-01FE • MB 229.31, 229.51, 229.52 • VW/Audi 504/507 • Porsche C30

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
EOTQT	EA	1 Quart	10.59	14.09
EOTQT	CA	12 Quarts	120.45	160.15

5W-30 LS¹³

Use in vehicles that require API SN • ACEA C3 • GM dexos2 • Chrysler MS-11106 • MB 229.51 • BMW LL-04 • Porsche C30 • VW 504.00/507.00

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AELQT	EA	1 Quart	13.99	17.89
AELQT	CA	12 Quarts	158.40	203.20
AEL1G	EA	1 Gallon	54.99	—
AEL1G	CA	4 Gallons	208.50	—

0W-40 FS

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN/SM... • BMW LL-01 • MB 229.1/229.3/229.5 • Porsche A40 • Renault 0710, 0700 • VW/Audi 502.00/505.00

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
EFOQT	EA	1 Quart	11.19	14.39
EFOQT	CA	12 Quarts	127.00	163.35

5W-40 MS

Use in vehicles that require ACEA C3 • API SN/SM/CF... • BMW LL-04 • Chrysler MS-10850 (supersedes MS-10896) • Ford WSS-M2C917-A • GM dexos2 (supersedes LL-A-025 and LL-B-025) • Renault RN0700/RN0710 • VW/Audi 502.00/505.01 • MB 229.51 • Porsche A40

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AFLQT	EA	1 Quart	11.89	15.29
AFLQT	CA	12 Quarts	134.55	173.45
AFL1G	EA	1 Gallon	46.69	59.19
AFL1G	CA	4 Gallons	176.90	224.30

5W-40 FS¹³

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN/SM... • BMW LL-01 • Renault 0710, 0700 • MB 229.5 • Porsche A40 • VW/Audi 502.00/505.00

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
EFMQT	EA	1 Quart	8.89	11.89
EFMQT	CA	12 Quarts	100.95	134.85
EFM1G	EA	1 Gallon	35.09	46.09
EFM1G	CA	4 Gallons	132.90	174.50

10W-60 FS¹³

Use in vehicles that require API SN • ACEA A3/B3, A3/B4

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ETSQT	EA	1 Quart	9.79
ETSQT	CA	12 Quarts	105.15

^{31, 13} See page 47 for Proposition 65 information for this product.

Synthetic Classic/Collector Car Motor Oil

AMSOIL Delivers Superior Rust Protection

In industry-standard testing, AMSOIL Z-ROD® completely prevented rust formation while a leading competitor did not.^{1,2}

Competing Brand

AMSOIL



^{1,2}Based upon in-house testing of AMSOIL Z-ROD 10W-40 and a leading competitor obtained on 7/25/2019 in ASTM D1748-10.





Z-ROD® Synthetic Motor Oil

High-zinc, high-phosphorus formulation engineered specifically for classic cars and performance vehicles.

10W-30

Use in vehicles that require API SL, SJ...

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ZRTQT	EA	1 Quart	11.59	14.99
ZRTQT	CA	12 Quarts	131.70	169.65

10W-40

Use in vehicles that require API SL, SJ...

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ZRDQT	EA	1 Quart	11.59	14.99
ZRDQT	CA	12 Quarts	131.70	169.65

20W-50

Use in vehicles that require API SL, SJ...

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ZRFQT	EA	1 Quart	14.09	18.09
ZRFQT	CA	12 Quarts	159.25	205.10

Assembly Lube¹⁷

Formulated to cling to engine parts and provide exceptional wear protection in newly built or rebuilt high-performance, racing and other four-stroke engines.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
EALTB	EA	(1) 4-oz. Tube	8.59	10.89
EALTB	CA	(12) 4-oz. Tubes	96.95	123.45

Break-In Oil¹⁷

Allows for quick and efficient piston ring seating in new and rebuilt high-performance and racing engines.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
BRKQT	EA	1 Quart	8.89	11.69
BRKQT	CA	12 Quarts	100.95	132.95

Premium Protection Synthetic Motor Oil

Ideal for gasoline engines and diesel applications not equipped with diesel particulate filters (DPF), where the extra protection of a high-zinc and TBN formula is desired.

10W-40¹³

Use in vehicles that require API CI-4+/SL... • ISO-L-EMA • Caterpillar ECF-1 • JASO MA (Motorcycle) • MAN 271/3275 • MTU Type 2 • Cummins 20071/20072/20076/20077 • Volvo VDS-2, VDS • Mack EO-M+ • ACEA A3/B3/E3/E5 • MB 228.1, 228.3, 229.1 • Detroit Diesel 93K214

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AMOQT	EA	1 Quart	11.79	15.39
AMOQT	CA	12 Quarts	133.60	174.75
AM01G	EA	1 Gallon	46.39	—
AM01G	CA	4 Gallons	175.60	—
AMOTP	EA	(1) 2.5 Gallon	114.70	—
AMOTP	CA	(2) 2.5 Gallons	217.40	—

20W-50¹³

Use in vehicles that require API CI-4+/SL... • ISO-L-EMA • Caterpillar ECF-1 • JASO MA (Motorcycle) • MAN 271/3275 • MTU Type 2 • Cummins 20071/20072/20076/20077 • Volvo VDS-2, VDS • Mack EO-M+ • ACEA A3/B3/E3/E5 • MB 228.1, 228.3, 229.1 • Detroit Diesel 93K214

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AROQT	EA	1 Quart	12.29	16.19
AROQT	CA	12 Quarts	139.50	183.60
AR01G	EA	1 Gallon	48.39	—
AR01G	CA	4 Gallons	183.45	—

^{17,13}See page 47 for Proposition 65 information for this product.

Synthetic Racing Oil



"AMSOIL products are the best on the market and definitely give us an added performance factor."

— **Bryce Menzies**
Professional Off-Road Driver





GBS2960



DOMINATOR® Synthetic Racing Oil

Superior performance and maximum protection in high-performance and racing applications.

5W-20¹⁷

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
RD20QT	EA	1 Quart	14.39	18.39
RD20QT	CA	12 Quarts	163.45	208.90

10W-30¹⁷

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
RD30QT	EA	1 Quart	13.79	17.79
RD30QT	CA	12 Quarts	156.85	201.95

10W-40¹⁷

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
RD40QT	EA	1 Quart	13.79	
RD40QT	CA	12 Quarts	156.85	

15W-50¹⁷

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
RD50QT	EA	1 Quart	14.49	18.59
RD50QT	CA	12 Quarts	164.40	210.80
RD501G	EA	1 Gallon	57.19	—
RD501G	CA	4 Gallons	216.65	—

SAE 60¹⁷

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
RD60QT	EA	1 Quart	14.99	19.09
RD60QT	CA	12 Quarts	169.70	217.15

20W-50 Synthetic Competition Diesel Oil¹³

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DCOQT	EA	1 Quart	12.99	
DCOQT	CA	12 Quarts	146.95	
DCO1G	EA	1 Gallon	50.99	
DCO1G	CA	4 Gallons	193.35	

Briggs & Stratton Synthetic 4T Racing Oil¹⁷

Formulated by AMSOIL specifically for stock and modified small-displacement air-cooled racing engines and recommended for any four-stroke air-cooled competition engine.


STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GBS2960	EA	1 Quart	11.25	14.95
GBS2960	CA	12 Quarts	134.90	179.40

DOMINATOR® Protects Better

DOMINATOR Competition Diesel Oil delivers **50% more** film thickness⁹ to withstand high cylinder pressures and protect against wear.

HIGH-TEMPERATURE/HIGH-SHEAR (HTHS) VISCOSITY

Higher = Better Wear Protection

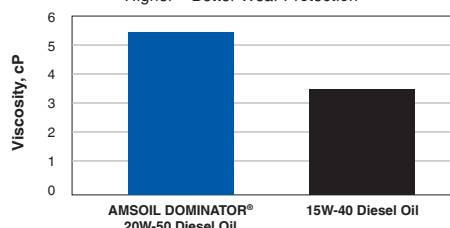

⁹Compared to the 3.5 cP HTHS limit for SAE 15W-40.

^{17,18}See page 47 for Proposition 65 information for this product.

TO ORDER: 1-800-777-7094 MONDAY – FRIDAY 7 A.M. – 7 P.M. • AMSOIL.COM

Free shipping on all orders of \$100 (\$130 CAN.) or more.

Orders below \$100 (\$130 Can.) pay a flat shipping rate of \$9.99 (\$12.99 Can.).



FALL 2023 | 23

Synthetic Diesel Oil



Keeps Turbos Clean

Signature Series Max-Duty Synthetic Diesel Oil provides protection boosted to the max, delivering up to **60% better turbo cleanliness¹** and withstanding the extra demands you place on the turbo when pulling heavy loads or updating the tune for maximum horsepower.

¹Based on specification standards of CAT C13 2nd Ring Top Land Carbon testing.

AMSOIL Fights Wear

AMSOIL delivers **powerful engine protection**. How good is it? In independent testing compared to a leading brand, AMSOIL Signature Series Diesel Oil provided long-lasting wear protection, **keeping cylinder liners looking like new.**^{DD}



^{DD}Based on independent testing of AMSOIL 5W-30 Signature Series Max-Duty Synthetic Diesel Oil and a leading conventional 15W-40 diesel oil using the Detroit Diesel® DD13 Scuffing test for specification DFS 93K222.


Protects Against Rust

Signature Series Max-Duty Synthetic Diesel Oil provides up to **2X better rust protection.**^K

^KBased on industry standard testing using the NMMA FC-W Rust Test.

Reduces Oil Consumption

Heavy-Duty Synthetic Diesel Oil provides up to **66% less** oil consumption, while Signature Series Max-Duty Synthetic Diesel Oil provides up to **76% less** oil consumption.^L

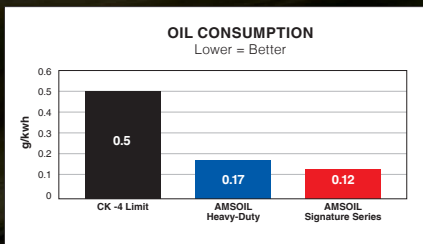


^LThan required by the API CK-4 standard in the Caterpillar-1N oil consumption test.

DHD




DTT



DEO



DME



DZF



Signature Series Max-Duty Synthetic Diesel Oil

The top tier of AMSOIL protection and performance for diesel engines. **Provides 6X more engine protection.¹**

5W-30¹³

Use in vehicles that require API CK-4/SN, SN+, CJ-4... • ACEA E9, E7, E6 • Mack EOS-4.5, EO-O • DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.51, 228.31 • MTU Type 3.1, 2.1, II, I • MAN 3677, 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC IV-10 LA, DQC III-10 LA • Scania LA-2 • Chrysler MS 10902 • Ford WSS-M2C214-B1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DHDQT	EA	1 Quart	11.19	14.79
DHDQT	CA	12 Quarts	126.90	167.75
DHD1G	EA	1 Gallon	43.99	57.69
DHD1G	CA	4 Gallons	166.70	218.60
DHDTP	EA	(1) 2.5 Gallon	108.80	—
DHDTP	CA	(2) 2.5 Gallons	206.25	—

10W-30¹³

Use in vehicles that require API CK-4/SN, CJ-4... • Volvo VDS4.5, VDS4, VDS3 • Mack EOS-4.5, EO-O • Renault RLD-4, RLD-3 • Cummins CES20086, CES20081 • Caterpillar ECF-2, ECF-3, ECF-1-a • DFS 93K222, DDC 93K218, 93K215, 93K214 • ACEA E9, E7 • MB 228.31 • MAN 3575 • MTU Type 2.1, II, I • JASO DH-2 • Deutz DQC III-10 LA • Chrysler MS 10902 • Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DTT1G	EA	1 Gallon	43.99	57.69
DTT1G	CA	4 Gallons	166.70	218.60
DTTTP	EA	(1) 2.5 Gallon	108.80	—
DTTTP	CA	(2) 2.5 Gallons	206.25	—

5W-40¹³

Use in vehicles that require API CK-4/SN, CJ-4... • ACEA E9, E7 • Mack EOS-4.5, EO-O • DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.31 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Allison TES-439 • Scania LA-2 • Chrysler MS 10902 • Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DEOQT	EA	1 Quart	11.19	14.79
DEOQT	CA	12 Quarts	126.90	167.75
DEO1G	EA	1 Gallon	43.99	57.69
DEO1G	CA	4 Gallons	166.70	218.60
DEOTP	EA	(1) 2.5 Gallon	108.80	142.45
DEOTP	CA	(2) 2.5 Gallons	206.25	270.00

15W-40¹³

Use in vehicles that require API CK-4/SN, CJ-4... • ACEA E9, E7 • Mack EOS-4.5, EO-O • DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.31 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Allison TES-439 • Scania LA-2 • Chrysler MS 10902 • Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DMEQT	EA	1 Quart	11.19	14.79
DMEQT	CA	12 Quarts	126.90	167.75
DME1G	EA	1 Gallon	43.99	57.69
DME1G	CA	4 Gallons	166.70	218.60
DMETP	EA	(1) 2.5 Gallon	108.80	142.45
DMETP	CA	(2) 2.5 Gallons	206.25	270.00

0W-40¹³

Delivers **4X better cold-temperature performance** when compared to SAE 15W-40 oil in ASTM D5293 Cold Cranking Viscosity test.

Use in vehicles that require API CK-4/SN, CJ-4... • ACEA E9, E7 • Mack EOS-4.5, EO-O • DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Chrysler MS 10902 • Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DZFQT	EA	1 Quart	11.19	14.79
DZFQT	CA	12 Quarts	126.90	167.75
DZF1G	EA	1 Gallon	43.99	57.69
DZF1G	CA	4 Gallons	166.70	218.60

¹³than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222 using 5W-30 as worst-case representation. ¹²See page 47 for Proposition 65 information for this product.



Heavy-Duty Synthetic Diesel Oil

Outstanding protection and performance for customers seeking an upgrade over conventional, synthetic-blend and other synthetic diesel oils. **Provides 4X more engine protection.¹**

● 10W-30¹³

Use in vehicles that require API CK-4, CJ-4... • ACEA E9, E7 • Mack EOS-4.5, EO-O • DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.31 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Chrysler MS 10902 • Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADNQT	EA	1 Quart	7.79	9.89
ADNQT	CA	12 Quarts	88.05	112.05
ADN1G	EA	1 Gallon	28.99	—
ADN1G	CA	4 Gallons	109.80	—
ADNTP	EA	(1) 2.5 Gallon	71.30	93.60
ADNTP	CA	(2) 2.5 Gallons	135.15	177.35

● 5W-40¹³

Use in vehicles that require API CK-4, CJ-4... • ACEA E9, E7 • Mack EOS-4.5, EO-O • DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.31 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Allison TES-439 • Chrysler MS 10902 • Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADOQT	EA	1 Quart	7.79	9.89
ADOQT	CA	12 Quarts	88.05	112.05
ADO1G	EA	1 Gallon	28.99	38.19
ADO1G	CA	4 Gallons	109.80	144.75
ADOTP	EA	(1) 2.5 Gallon	71.30	93.60
ADOTP	CA	(2) 2.5 Gallons	135.15	177.35

● 15W-40¹³

Use in vehicles that require API CK-4, CJ-4... • ACEA E9, E7 • Mack EOS-4.5, EO-O • DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.31 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Allison TES-439 • Chrysler MS 10902 • Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADPQT	EA	1 Quart	7.79	9.89
ADPQT	CA	12 Quarts	88.05	112.05
ADP1G	EA	1 Gallon	28.99	38.19
ADP1G	CA	4 Gallons	109.80	144.75
ADPTP	EA	(1) 2.5 Gallon	71.30	93.60
ADPTP	CA	(2) 2.5 Gallons	135.15	177.35

100% Synthetic Diesel Oil

Provides outstanding protection, performance and fuel economy for smaller American diesel pickups, vans, cars and SUVs. **Delivers up to 6X better engine protection²** than required by a leading industry standard.²

● 0W-20

Use in vehicles that require GM dexosD

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DP020QT	EA	1 Quart	10.19	13.69
DP020QT	CA	12 Quarts	115.60	155.75

● 5W-30

Use in vehicles that require GM dexosD, dexos2 • Chrysler MS-11106 • Ford WSSM2C214-B1 • ACEA C3

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DP530QT	EA	1 Quart	10.09	13.59
DP530QT	CA	12 Quarts	114.70	154.50

● 15W-40 Synthetic Heavy Duty Diesel and Marine Oil¹³

Provides outstanding protection for on- and off-road diesel applications not equipped with diesel particulate filters (DPFs), where extra TBN is desired for long service intervals.

Use in vehicles that require API CI-4+/SL... • Global DHD-1 • ACEA A3/B3, E2, E3, E5, E7 • JASO DH-1 • Mack EO-M, EO-N • DDC 93K214 • Caterpillar ECF-1-a, ECF-2 • Cummins CES 20076, 20077, 20078 • Volvo VDS-3, VDS-2 • MB 228.1, 228.3, 229.1 • MAN 271, 3275 • MTU Type II

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AMEQT	EA	1 Quart	11.79	15.49
AMEQT	CA	12 Quarts	133.10	176.00
AME1G	EA	1 Gallon	46.19	60.49
AME1G	CA	4 Gallons	174.90	229.15
AMETP	EA	(1) 2.5 Gallon	114.25	149.50
AMETP	CA	(2) 2.5 Gallons	216.50	283.40

Like Heavy Duty Diesel and Marine Oil? Try Signature Series Max-Duty 15W-40 for a serious upgrade. See page 25.

¹than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222 using 10W-30 as worst-case representation. ²Based on third-party testing in the OM646LA cam wear test using 0W-20 as worst-case representation. ¹³See page 47 for Proposition 65 information for this product.

Synthetic Transmission Fluid



Signature Series Synthetic ATF

Provides reserve protection in fleet vehicles, work trucks and other severe-service applications that quickly break down other lubricants.

● Multi-Vehicle³⁷

Use in applications that require Allison C-4, TES-389 - BMW 7045E, 8072B, LA 2634, LT 71141 - Chrysler ATF-4, Mopar ASRC, 68089195AA, 68049954AA - Ford MERCON, MERCON V, ESP-M2C166-H, FNR5, M2C924-A, XL-12 - GM DEXRON II, DEXRON III, AutoTrak II - Honda/Acura ATF-Z1 - Hyundai/Kia SP-II, SP-III, Red-1 - IDEMITSU K17 - JASO 1A - JWS 3309, 3314, 3317 - MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339 Type Z-3, 339F - Mazda ATF-M III, ATF-MV, F-1 - Mercedes Benz 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, 236.81, 236.91 - Mitsubishi SP-II, SP-III, ATF-J2 - Nissan Matic-D, Matic-J, Matic-K, 402 - Saab 3309 - Shell 3403, LA 2634 - Subaru ATF, ATF-HP - Suzuki 3314, 3317 - Texaco ETL-7045E, ETL-8072B, N402 - Toyota Type T, T-II, T-III, T-IV - Voith 55.6335, 55.6336 - Volvo 97340, 97341 - VW/Audi G 052 162, G 052 990, G 055 025 - ZF TE-ML 03D, 04D, 05L, 09, 11A, 11B, 14A, 14B, 14C, 16L, 16M, 17C, 20B, 20C, 21L

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATFQT	EA	1 Quart	14.59	18.59
ATFQT	CA	12 Quarts	165.30	210.80
ATFPK	EA	1 Quart Easy-Pack	16.09	20.59
ATFPK	CA	12 Quart Easy-Packs	183.10	233.60
ATF1G	EA	1 Gallon	57.49	-
ATF1G	CA	4 Gallons	217.85	-
ATFTP	EA	(1) 2.5 Gallon	142.55	179.05
ATFTP	CA	(2) 2.5 Gallons	270.20	339.40

● Fuel-Efficient³⁷

Provides the same benefits as AMSOIL Multi-Vehicle Synthetic Automatic Transmission Fluid in a fuel-efficient formulation engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

Use in applications that require Aisin-Warner AW-1 - BMW 83 22 0 142 516, 83 22 2 152 426 - Chrysler Mopar 68157995AA, SP-IV, 68218925AB - DSIH 6p805 - Ford MERCON LV, SP ULV - GM DEXRON HP VI, ULV - Honda/Acura DW-1, Type 3.0 - Hyundai/Kia SP-IV, SPH-IV, SP-IV-RR, NWS-9638, SP4-M - JASO 1A-LV - JWS 3324 - Mercedes Benz 236.12, 236.14, 236.15, 236.41 - Mitsubishi SP-IV, ATF J3, ATF-PA - Nissan Matic-S, Matic-W - Saab 93 165 147 - Shell M-1375.4, M-1375.5, M-1375.6, M-L 12108 - Toyota WS - Volvo 31256774 - VW/Audi G 055 005, G 055 162, G 060 162 - ZF S671 090 255

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATLQT	EA	1 Quart	14.59	19.19
ATLQT	CA	12 Quarts	165.45	217.80
ATLPK	EA	1 Quart Easy-Pack	16.29	21.39
ATLPK	CA	12 Quart Easy-Packs	184.45	243.10
ATL1G	EA	1 Gallon	57.59	-
ATL1G	CA	4 Gallons	218.05	-
ATLTP	EA	(1) 2.5 Gallon	142.70	184.80
ATLTP	CA	(2) 2.5 Gallons	270.45	350.30



OE Synthetic ATF

Resists wear and provides smooth shifts in passenger-car/light-truck automatic transmissions.

● Multi-Vehicle¹³

Use in applications that require Allison C-4, TES-389 - BMW 7045E, 8072B, LA 2634, LT 71141 - Chrysler ATF-4, Mopar ASRC, 68089195AA, 68049954AA - Ford MERCON, MERCON V, ESP-M2C166-H, FNR5, M2C924-A, XL-12 - GM DEXRON II, DEXRON III, AutoTrak II - Honda/Acura ATF-Z1 - Hyundai/Kia SP-II, SP-III, Red-1 - IDEMITSU K17 - JASO 1A - JWS 3309, 3314, 3317 - MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339F - Mazda ATF-M III, ATF-MV, F-1 - Mercedes Benz 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, 236.81, 236.91 - Mitsubishi SP-II, SP-III, ATF-J2 - Nissan Matic-D, Matic-J, Matic-K, 402 - Saab 3309 - Shell 3403, LA 2634 - Subaru ATF, ATF-HP - Suzuki 3314, 3317 - Texaco ETL-7045E, ETL-8072B, N402 - Toyota Type T, T-II, T-III, T-IV - Voith 55.6335, 55.6336 - Volvo 97340, 97341 - VW/Audi G 052 162, G 052 990, G 055 025 - ZF TE-ML 03D, 04D, 05L, 09, 11A, 11B, 14A, 14B, 16L, 17C, 20B, 21L

¹³AMSOIL warrants the use of this product for Chrysler ATF-4 applications above -38°F. Product does not meet the cold temperature requirement of ATF-4 at -40°F. For warranty information, visit www.amsoil.com/warranty.aspx.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OTFQT	EA	1 Quart	9.39	12.49
OTFQT	CA	12 Quarts	106.75	141.80
OTF1G	EA	1 Gallon	37.09	-
OTF1G	CA	4 Gallons	140.65	-
OTFTP	EA	(1) 2.5 Gallon	91.65	119.60
OTFTP	CA	(2) 2.5 Gallons	173.70	226.65

● Fuel-Efficient¹³

Provides the same benefits as AMSOIL OE Multi-Vehicle Synthetic Automatic Transmission Fluid in a fuel-efficient formulation engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

Use in applications that require Aisin-Warner AW-1 - BMW 83 22 0 142 516, 83 22 2 152 426 - Chrysler Mopar 68157995AA, SP-IV, 68218925AB - DSIH 6p805 - Ford MERCON LV - GM DEXRON VI - Honda/Acura DW-1, Type 3.0 - Hyundai/Kia SP-IV, SPH-IV, SP-IV-RR, NWS-9638, SP4-M - JASO 1A-LV - JWS 3324 - Mercedes Benz 236.12, 236.14, 236.15, 236.41 - Mitsubishi SP-IV, ATF J3, ATF-PA - Nissan Matic-S, Matic-W - Saab 93 165 147 - Shell M-1375.4, M-1375.5, M-1375.6, M-L12108 - Toyota WS - Volvo 31256774 - VW/Audi G 055 005, G 055 162, G 060 162 - ZF S671 090 255

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
OTLQT	EA	1 Quart	9.39	12.59
OTLQT	CA	12 Quarts	106.90	142.45
OTL1G	EA	1 Gallon	37.19	-
OTL1G	CA	4 Gallons	140.85	-
OTLTP	EA	(1) 2.5 Gallon	91.75	120.65
OTLTP	CA	(2) 2.5 Gallons	173.90	228.65

³⁷See page 47 for Proposition 65 information for this product.

"Changed out the transmission fluid in my GMC* 2500 with the AMSOIL OE. The difference is noticeable with how smooth the truck shifts. Great product."

— **Jimmy**
Upstate NY



○ Synthetic CVT Fluid¹³

Provides outstanding protection and performance for continuously variable transmissions (CVT) throughout original equipment manufacturer (OEM)-recommended drain intervals.

Use in belt- and chain-type CVTs that require BMW EZL 799A (8322 0 136 376 / 8322 0 429 154) • Daihatsu Amix CVTF-DG, CVTF-DFE • FCA Mopar CVTF +4 (Mopar CVT 4) • Ford M2C928-A (CFT 23), WSS-M2C933-A (CFT 30), Motorcraft XT-7-OCFT, MERCON C • GM DEX-CVT, GM CVT (CVTF-I-Green2) • Honda HMMF (08200-9006), HCF-2 • Hyundai/Kia SP-CVT 1 • Mazda CVTF 3320 • Mercedes-Benz 236.20 (001 989 46 03) • Mitsubishi CVTF-J1, CVTF-J4 • Nissan NS-1, NS-2, NS-3 • Subaru e-CVT, i-CVT F, Lineartronic CV-30, Lineartronic CVTF/CVT-II (K0425Y0710), High Torque CVTF • Suzuki CVT Fluid Green 1, CVT Fluid Green 2 (NS-2), CVTF 3320 (TC) • Toyota/Lexus TC, FE • VW/Audi TL 52180 (G 052 180), TL 52516 (G 052 516)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
CVTQT	EA	1 Quart	13.39	17.59
CVTQT	CA	12 Quarts	151.45	200.05
CVT1G	EA	1 Gallon	52.59	—
CVT1G	CA	4 Gallons	199.35	—

● 100% Synthetic DCT Fluid

Designed to protect high-tech dual-clutch transmissions during the most intense, high-heat operating conditions.

Use in applications that require BMW 83 22 2 148 578, 83 22 2 148 579, 83 22 0 440 214, 83 22 2 147 477, DCTF-1, MTF-LT-5 • Chrysler 68044345 • Citroen/Peugeot 9734.S2 • Ferrari/Shell TF DCTF-3 • Fiat BOT 341 • Ford WSS-M2C936-A, WSS-M2C200-D2, XT-11-GDC • Mercedes-Benz 236.21, 236.25 • Mitsubishi Dia-Queen SSTF-I • Nissan GT-R Transmission Oil R35 Special • Pentosin FFL-2, FFL-3, FFL-4 • Porsche 999.917.080.00, 043 207.29, 043 207.30, 000 430 20 • Renault BOT 450 • Volvo 1161838, 1161839 • VW/Audi G 052 182, G 052 529, TL 521 82

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DCTQT	EA	1 Quart	20.79	27.79
DCTQT	CA	12 Quarts	236.30	315.90

○ Synthetic Manual Transmission and Transaxle Gear Lube¹⁵

Provides improved internal component protection. Formulated with extreme-pressure additives and advanced frictional qualities that provide smooth shifts while protecting gears, bearings and seals. Non-corrosive to yellow metals.

Use in applications that require API GL-4 • ZF TE-ML 02B, 17A, MB 235.5 & MAN 341-Z2 (formerly MAN 341 ML) • Synchronized manual transmissions and transaxles that require 75W-85, 75W-90 or 80W-90 API GL-4 Gear Lube • NV 4500 Transmissions • GM Part #12346190 • Chrysler Part #4874459 • Chrysler Spec MS-9070 • Certain Hyundai, Hino, Infiniti, Kia, Lexus, Mazda, Mitsubishi, Nissan, Suzuki, Toyota & Volkswagen models requiring GL-4

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MTGQT	EA	1 Quart	17.49	22.39
MTGQT	CA	12 Quarts	198.45	254.50
MTGPK	EA	1 Quart Easy-Pack	19.09	24.49
MTGPK	CA	12 Quart Easy-Packs	217.10	278.55

● Synthetic Synchronesh Transmission Fluid

Specifically designed to deliver smooth shifts and superior wear protection in manual transmissions and transaxles with synchronizers.

Use in applications that require New Venture NV T350, NV1500, NV2500, NV3500, NV3550 & NV5600 • Tremec T4, T5, T18, T56, T176, TK0500, TK0600, TR3550 (GM Vehicles) & TR3450 • Honda Genuine MTF • GM Part #12345349, #12345577, #12377916 & #1052931 • Chrysler Part #4874464 & #4874465 • GM Specs #9985648, #9986105 & #9985535 • Chrysler Specs MS-9224 & MS-9417 • MTF-94 & Texaco MTX Fluids

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MTFQT	EA	1 Quart	15.79	20.29
MTFQT	CA	12 Quarts	178.65	229.80

○ Super Shift® Synthetic Racing Transmission Fluid¹⁷

Formulated to prevent slippage and reduce heat in high-performance, high-horsepower vehicles.

Use in transmissions that require Allison C-4 • Ford Type F

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ARTQT	EA	1 Quart	13.89	17.69
ARTQT	CA	12 Quarts	157.40	200.70

● Torque-Drive® Synthetic Heavy-Duty ATF³¹

Premium fluid designed for use in both on- and off-highway heavy-duty equipment.

Use in transmissions that require Allison C-4, TES-295, TES-389, TES-668; Ford MERCON® V; GM DEXRON® III; Isuzu SCS; JASO 1-A; MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339 Type Z-3, 339F; MB 236.91, 236.10; Voith 55.6335, 55.6336; Volvo 97340, 97341; ZF TE-ML 03D, TE-ML 04D, TE-ML 14A, TE-ML 14B, TE-ML 14C, TE-ML 17C, TE-ML 20B, TE-ML 20C

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATD1G	EA	1 Gallon	56.69	74.29
ATD1G	CA	4 Gallons	214.90	281.50
ATDTP	EA	(1) 2.5 Gallon	140.65	—
ATDTP	CA	(2) 2.5 Gallons	266.55	—

● Synthetic Tractor Hydraulic/Transmission Oil¹³

Formulated for combinations of transmissions, hydraulic systems, final drives, power take-off systems and wet brakes in heavy-duty farm and industrial equipment as well as commercial and residential lawn tractors.

Use in hydraulic systems that require SAE 5W-30

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATHQT	EA	1 Quart	11.39	14.49
ATHQT	CA	12 Quarts	129.50	164.60

^{13,15,17,31} See page 47 for Proposition 65 information for this product.

Synthetic Gear Lube



“Whoever invented the easy-pack concept is a genius. Especially for servicing transfer cases and differentials. It lives up to its name. Not only an innovative oil, but innovative packaging as well.”

– **Joey**
Calif.



SEVERE GEAR® Synthetic Gear Lube

Specifically engineered for high-demand applications, including trailer towing, heavy hauling, 4x4 off-road driving, commercial use and racing. Flexible easy-pack helps you access tough-to-reach fill holes and eliminates the need for a pump.

● 75W-90

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
SVGQT	EA	1 Quart	17.29	21.99
SVGQT	CA	12 Quarts	196.45	250.05
SVGPK	EA	(1) Quart Easy-Pack	17.29	21.99
SVGPK	CA	(12) Quart Easy-Packs	196.45	250.05

○ 80W-90¹³

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AGLQT	EA	1 Quart	13.09	16.59
AGLQT	CA	12 Quarts	148.20	188.65
AGLPK	EA	1 Quart Easy-Pack	14.69	18.69
AGLPK	CA	12 Quart Easy-Packs	166.65	212.10

● 75W-110

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
SVTQT	EA	1 Quart	17.49	22.29
SVTQT	CA	12 Quarts	198.30	253.20
SVTPK	EA	1 Quart Easy-Pack	19.19	24.49
SVTPK	CA	12 Quart Easy-Packs	217.85	278.55

● 75W-140

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
SVOQT	EA	1 Quart	18.99	24.79
SVOQT	CA	12 Quarts	216.00	281.70
SVOPK	EA	(1) Quart Easy-Pack	18.99	24.79
SVOPK	CA	(12) Quart Easy-Packs	216.00	281.70

● Slip Lock® Differential Additive²¹

Designed to eliminate gear-housing chatter in cars, trucks and SUVs equipped with limited-slip differentials.

Note: AMSOIL synthetic gear lubes do not require the use of this additive. However, not all differentials respond the same and if chatter is noticed, the addition of AMSOIL Slip Lock will eliminate it.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADATB	EA	(1) 4-oz. Tube	8.69	11.49
ADATB	CA	(12) 4-oz. Tubes	98.00	129.80

SEVERE GEAR® EP Synthetic Racing Gear Lube

Engineered specifically for the demands of severe racing conditions, including off-road truck racing, rock racing, rock crawling, tractor pulling, funny car racing and dragster racing applications.

● SAE 250²⁸

Use in differentials that require API GL-5/MT-1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
SRTQT	EA	1 Quart	18.19	23.29
SRTQT	CA	12 Quarts	206.05	264.60

Long Life Synthetic Gear Lube

Specifically engineered for extended drain intervals up to 500,000 miles (804,672 km) as set by equipment manufacturers for over-the-road trucks and heavy equipment.


● 75W-90¹³

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 256 (Eaton PS-163)

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
FGRQT	EA	1 Quart	14.99	18.49
FGRQT	CA	12 Quarts	170.45	210.20
FGR1G	EA	1 Gallon	59.39	—
FGR1G	CA	4 Gallons	225.15	—

Easy Installation

PRODUCT	STOCK#	U.S. P.C.	CAN. P.C.
Hand Pump	G2039	10.50	13.65
Flexible Pour Spout	G1230	0.80	1.05
Nozzle Dispenser Caps (6)	G1242	1.05	1.60
FloTool Flexible Pour Spout	G3721	4.20	5.65



^{13,21,28} See page 47 for Proposition 65 information for this product.

TO ORDER: 1-800-777-7094 MONDAY – FRIDAY 7 A.M. – 7 P.M. • AMSOIL.COM

Free shipping on all orders of \$100 (\$130 CAN.) or more.

Orders below \$100 (\$130 Can.) pay a flat shipping rate of \$9.99 (\$12.99 Can.).



Fuel Additives



Gasoline Stabilizer¹³

Helps prevent the formation of varnish and sludge in stored seasonal equipment such as snowmobiles, lawnmowers, motorcycles and boats.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ASTCN	EA	(1) 16-oz. Bottle	11.69	15.49
ASTCN	CA	(6) 16-oz. Bottles	66.30	87.70

AMSOIL Fights Corrosion

AMSOIL Gasoline Stabilizer provides corrosion protection Sea Foam® Motor Treatment can't match, helping maintain power and performance and keeping metal looking like new even when subjected to salt water.*



Sea Foam



AMSOIL

*Based upon independent testing of AMSOIL Gasoline Stabilizer obtained Nov. 8, 2018 and Sea Foam Motor Treatment purchased Oct. 25, 2018 in a modified NACE TM0172 using synthetic sea water per ASTM D665 part B.

Upper Cylinder Lubricant¹³

Lubricates fuel system and upper cylinders. Fights ethanol-related corrosion. Helps keep injectors clean. Bottle compatible with capless fuel systems. Use entire bottle at every fill-up.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
UCLCN	EA	(1) 6-oz. Bottle	4.49	6.09
UCLCN	CA	(12) 6-oz. Bottles	50.45	69.00

P.i.® Performance Improver¹³

Concentrated detergent aggressively cleans stubborn, power-robbing deposits from injectors, valves and the combustion chamber in passenger cars and light trucks. Bottle compatible with capless fuel systems.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
APICN	EA	(1) 12-oz. Bottle	12.99	16.69
APICN	CA	(12) 12-oz. Bottles	147.75	189.30

¹³See page 47 for Proposition 65 information for this product.



Quickshot®

Effectively addresses performance issues related to ethanol, water and dirty pump gas in two- and four-stroke gasoline-powered engines and powersports equipment fuel systems, restoring peak performance.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AQSCN	EA	(1) 8-oz. Bottle	9.19	12.19
AQSCN	CA	(6) 8-oz. Bottles	52.20	69.00

DOMINATOR® Octane Boost²¹

Improves the performance of all two- and four-stroke gasoline-fueled engines.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AQBBE	EA	(1) 12-oz. Bottle	9.89	12.89
AQBBE	CA	(6) 12-oz. Bottles	55.75	72.80

Diesel Recovery²¹

Emergency diesel fuel treatment that liquefies gelled diesel fuel and thaws frozen fuel filters. Keep a bottle on hand for emergencies.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DRCQT	EA	(1) 30-oz. Bottle	12.39	16.39
DRCQT	CA	(12) 30-oz. Bottles	140.85	185.50

Diesel All-In-One²⁵

Combines the superior deposit-removing properties of Diesel Injector Clean, the excellent anti-gelling properties of Diesel Cold Flow and the cetane-boosting benefits of Diesel Cetane Boost in one convenient package.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADBPEN	EA	(1) 8-oz. Bottle	5.99	--
ADBPEN	CA	(6) 8-oz. Bottles	33.85	--
ADBCN	EA	(1) 16-oz. Bottle	10.59	14.19
ADBCN	CA	(12) 16-oz. Bottles	119.95	161.45
ADBHG	EA	(1) 64-oz. Bottle	37.59	--
ADBHG	CA	(6) 64-oz. Bottles	213.40	--



Diesel Cold Flow¹⁷

Effectively modifies wax crystal formation at low temperatures to depress diesel fuel pour point and improve cold-flow filtration properties. Lowers cold filter-plugging point (CFPP) by up to 40°F (22°C) in ultra-low-sulfur diesel (ULSD).

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ADDCN	EA	(1) 16-oz. Bottle	8.89
ADDCN	CA	(12) 16-oz. Bottles	100.75

Diesel Cetane Boost

Raises the cetane number of diesel fuel up to eight points for maximum horsepower, increased fuel economy and easier starts in all diesel engines. Diesel engines operate best on fuel with cetane values of 50 or higher. Most diesel fuel sold in North America has a cetane value of 40-45.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ACBCN	EA	(1) 16-oz. Bottle	9.29	12.49
ACBCN	CA	(12) 16-oz. Bottles	105.65	141.80
ACBHG	EA	(1) 64-oz. Bottle	31.59	--
ACBHG	CA	(6) 64-oz. Bottles	179.60	--

Diesel Injector Clean¹⁹

Targets traditional nozzle deposits, combustion chamber deposits and internal diesel injector deposits found in HPCR injectors. Lubricates to reduce fuel pump and injector wear. Concentrated for rapid results, maximum horsepower and up to 8 percent increased fuel economy in engines with accumulated deposits.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADFPEN	EA	(1) 8-oz. Bottle	4.79	--
ADFPEN	CA	(6) 8-oz. Bottles	26.90	--
ADFCN	EA	(1) 16-oz. Bottle	8.29	11.19
ADFCN	CA	(12) 16-oz. Bottles	93.70	126.60
ADFHG	EA	(1) 64-oz. Bottle	28.39	--
ADFHG	CA	(6) 64-oz. Bottles	160.95	--

Diesel Injector Clean + Cetane Boost²¹

Combines the superior deposit-removing properties of Diesel Injector Clean with the cetane-boosting benefits of Diesel Cetane Boost in one convenient package.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ADSPCN	EA	(1) 8-oz. Bottle	5.09	--
ADSPCN	CA	(6) 8-oz. Bottles	28.75	--
ADSCN	EA	(1) 16-oz. Bottle	12.49	16.59
ADSCN	CA	(12) 16-oz. Bottles	141.30	188.05
ADSHG	EA	(1) 64-oz. Bottle	42.09	--
ADSHG	CA	(6) 64-oz. Bottles	239.40	--

^{21,25,17,19}See page 47 for Proposition 65 information for this product.

Extended Filter Life

- AMSOIL Oil Filters designated with product code EA15K are recommended for 15,000 miles (24,100 km) or one year, whichever comes first, in normal or severe service. NOTE: Change oil filter at every oil change.
- AMSOIL Oil Filters designated with product code EAO are recommended for 25,000 miles (40,200 km) or one year, whichever comes first, in normal service or 15,000 miles (24,100 km) or one year, whichever comes first, in severe service. NOTE: Change oil filter at every oil change.
- When AMSOIL Oil Filters are used with a motor oil other than AMSOIL motor oil, the filter should be changed according to the vehicle manufacturer's recommendation.

Oil Filters

AMSOIL Oil Filters rank among the highest efficiency filters available to the auto/light-truck and powersports markets, providing a filtering efficiency of 99 percent at 20 microns. Featuring advanced full-synthetic technology, AMSOIL Oil Filters provide greater efficiency, capacity and durability than cellulose filters, extending engine and filter life and reducing engine wear. Easy-grip coating eases the job of tightening and loosening filters. Call 1-800-777-7094 (Monday-Friday, 7 a.m.- 7 p.m. Central Time) or look up your vehicle at AMSOIL.com to determine the appropriate filter for each application. NOTE: Change oil filter at every oil change.



Oil Filters

STOCK#	UNITS	U.S. P.C.	CAN. P.C.	STOCK#	UNITS	U.S. P.C.	CAN. P.C.
EA15K01	EA	20.65	27.45	EA15K32	EA	18.20	24.15
EA15K02	EA	20.95	27.80	EA034	EA	19.00	25.20
EA15K03	EA	19.30	25.60	EA15K35	EA	18.20	24.10
EA15K04	EA	20.05	26.60	EA15K37	EA	15.75	20.90
EA15K05	EA	19.45	25.75	EA15K38	EA	16.05	21.30
EA15K06	EA	16.95	22.50	EA15K39	EA	24.35	32.30
EA15K07	EA	14.50	19.25	EA042	EA	18.50	24.55
EA15K08	EA	21.30	28.20	EA15K43	EA	20.65	27.45
EA15K09	EA	19.25	25.55	EA15K49	EA	27.75	36.85
EA011	EA	17.90	23.75	EA15K50	EA	16.90	22.45
EA15K12	EA	17.40	23.05	EA15K51	EA	17.40	23.05
EA15K13	EA	18.25	24.25	EA052	EA	19.25	25.55
EA015	EA	19.10	25.40	EA15K53	EA	17.90	23.75
EA15K16	EA	18.20	24.10	EA15K54	EA	23.45	31.10
EA017	EA	17.60	23.35	EA055	EA	30.80	40.85
EA15K19	EA	18.20	24.15	EA059	EA	18.70	24.80
EA15K20	EA	19.10	25.40	EA064	EA	17.75	23.60
EA023	EA	17.90	23.75	EA080	EA	20.50	27.20
EA024	EA	19.30	25.65	EA15K88	EA	37.60	49.90
EA026	EA	20.95	27.85	EA098	EA	33.30	44.20
EA15K28	EA	19.10	25.40	EA099	EA	34.50	45.80
EA15K29	EA	18.50	24.55				

EAHD



Heavy-Duty Extended-Life Oil Filters

Provide excellent 99 percent filtering efficiency at 20 microns and high contaminant capacity for heavy-duty on- and off-road diesel and gasoline applications. Provide extended service intervals that coincide with the maximum drain intervals of AMSOIL synthetic engine oils.

See AMSOIL.com or call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

EABP



Bypass Filters

High-efficiency bypass filters effectively remove minute dirt particles and soot by working in conjunction with the engine's full-flow filter and capturing contaminants that full-flow filter can't remove.

See AMSOIL.com or call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

Grease



Synthetic Polymeric Off-Road Grease

Extreme-pressure, moly-fortified grease that provides outstanding protection for heavy-load-bearing applications, including steering knuckles, spring shackles, heavy equipment pivot joints and other components operating in high-load, low-speed conditions.

● Synthetic Polymeric Off-Road Grease³⁶

Use in applications that require NLGI No. 1, 5% Moly

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GPOR1CR	EA	(1) 15-oz. Cartridge	10.59	13.69
GPOR1CR	CA	(10) 15-oz. Cartridges	104.50	135.60

● Synthetic Polymeric Off-Road Grease³⁶

Use in applications that require NLGI No. 2, 5% Moly

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GPOR2CR	EA	(1) 15-oz. Cartridge	11.09	14.49
GPOR2CR	CA	(10) 15-oz. Cartridges	109.20	140.85

Synthetic Polymeric Truck, Chassis/Equipment Grease

Delivers excellent wear protection and performance in severe-service, extreme-pressure environments such as axle assemblies, U-joints, pivot pins, fifth-wheel plates, steering linkages, kingpins, water pump bearings, ball joints and other greasable bearings and chassis components.

● Synthetic Polymeric Truck, Chassis/Equipment Grease³⁵

Use in applications that require NLGI No. 1

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GPTR1CR	EA	(1) 14-oz. Cartridge	8.99	11.99
GPTR1CR	CA	(10) 14-oz. Cartridges	89.10	118.70

● Synthetic Polymeric Truck, Chassis/Equipment Grease³⁵

Use in applications that require NLGI No. 2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GPTR2CR	EA	(1) 14-oz. Cartridge	9.69	12.89
GPTR2CR	CA	(10) 14-oz. Cartridges	95.75	127.15



DOMINATOR® Synthetic Racing Grease²¹

High-performance bearing and chassis lubrication for all race applications on snow, dirt, water and track. Designed for bearings that operate under high-speed, high-heat and low-temperature conditions.

Use in applications that require NLGI No. 2, GC/LB

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GRGCR	EA	(1) 14-oz. Cartridge	13.79	17.39
GRGCR	CA	(10) 14-oz. Cartridges	134.60	169.35

Synthetic Multi-Purpose Grease

Delivers premium wear protection for bearings, bushings, chassis lubrication and other applications.

Use in applications that require NLGI No. 2 • GC/LB

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GLCCR	EA	(1) 14-oz. Cartridge	8.69	11.49
GLCCR	CA	(10) 14-oz. Cartridges	84.05	111.35

Synthetic Water-Resistant Grease

Provides outstanding water-washout and spray-off resistance for applications frequently exposed to water, mud, snow or ice.

Use in applications that require NLGI No. 2 • GC/LB

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
GWRCR	EA	(1) 14-oz. Cartridge	8.89	11.69
GWRCR	CA	(10) 14-oz. Cartridges	85.30	112.90

Spray Grease

Applies quickly and evenly and is ideal for greasing hard-to-reach equipment, including hinges, springs, industrial chains, latches, slides, winches and other common applications.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
GSPSC	EA	(1) 10-oz. Spray Can	9.29
GSPSC	CA	(12) 10-oz. Spray Cans	104.90

^{36,35,21}See page 47 for Proposition 65 information for this product.

Synthetic ATV/UTV Oil



Formulated to deliver premium protection and performance for hard-working and performance ATVs and UTVs.



Synthetic ATV/UTV Motor Oil

Formulated to provide upgraded performance and protection for hard-working and performance ATVs and UTVs.

● 10W-30¹³

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUV30QT	EA	1 Quart	11.19	—
AUV30QT	CA	12 Quarts	126.45	—

● 5W-40¹³

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUV54QT	EA	1 Quart	12.29	16.19
AUV54QT	CA	12 Quarts	139.15	184.20

● 10W-40

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUV40QT	EA	1 Quart	12.29	16.19
AUV40QT	CA	12 Quarts	139.45	184.25

○ 0W-50

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUV05QT	EA	1 Quart	14.49	—
AUV05QT	CA	12 Quarts	164.75	—

● 5W-50

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUV50QT	EA	1 Quart	12.59	16.09
AUV50QT	CA	12 Quarts	142.25	182.35



See p. 41 for Synthetic Chaincase & Gear Oil.

^{13,18} See page 47 for Proposition 65 information for this product.



● Synthetic ATV/UTV Transmission & Differential Fluid¹⁸

Use in ATV and UTV transmissions and differentials, including those made by Polaris*, Honda*, Yamaha*, Kawasaki*, Can Am* and Suzuki*.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUDTQT	EA	1 Quart	13.99	18.09
AUDTQT	CA	12 Quarts	159.05	205.75
AUDTPK	EA	1 Quart Easy-Pack	15.69	20.39
AUDTPK	CA	12 Quart Easy-Packs	178.45	231.05

● Synthetic ATV/UTV Powertrain Fluid¹³

Purpose-built for transmission/differentials and front drives in Polaris* ATVs and UTVs, offering the perfect combination of protection and convenience.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AUPTPK	EA	1 Quart Easy-Pack	14.39	18.99
AUPTPK	CA	12 Quart Easy-Packs	163.55	215.90

ATV/UTV Oil Change Kits for Polaris* Vehicles

FITMENT INFO:

PK1: ACE* 900, GENERAL* 1000, 2013+ RANGER* 900 & 1000, 2013+ RZR* 900 & 1000

PK2: ATP* 330, 500, Hawkeye* 300, 400, Magnum* 325, 330, 500, RANGER 400, Model years 2016 and previous - RANGER 500, Scrambler 500, 850, 1000, Sportsman* 300, 400, 450, 500, 550, 570, 850, 1000, Trail Blazer* 330, Trail Boss* 325, 330, Xplorer* 500

PK3: ACE 500, 570, 2017 + RANGER 500, RANGER 570, 700, 800, RZR 570, 800, Sportsman 600, 700, 800

PK4: RZR Turbo* 1000

Contains everything needed to perform an oil change on most Polaris UTVs and ATVs using AMSOIL Synthetic 5W-50 ATV/UTV Motor Oil. See AMSOIL.com or call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
PK1	EA	1 kit	39.60	52.70
PK2	EA	1 kit	35.10	46.65
PK3	EA	1 kit	32.95	43.95
PK4	EA	1 kit	48.35	64.15

ATV/UTV Oil Change Kits for Can-Am* Vehicles

FITMENT INFO:

CK1: Rotax* 900 ACE* (Maverick* X3, DS650)

CK2: Rotax V-Twin 500cc to 1,000cc (Outlander*, Renegade*, Commander*, Defender*, Maverick)

CK3: Rotax 450cc (Defender, Outlander)

CK4: Rotax 900 ACE (Maverick X3, DS650)

CK5: Rotax V-Twin 500cc to 1,000cc (Outlander, Renegade, Commander, Defender, Maverick)

CK6: Rotax 450cc (Defender, Outlander)

Contains everything needed to perform an oil change on most Can-Am UTVs and ATVs using AMSOIL Formula 4-Stroke® Powersports Synthetic Motor Oil or Synthetic 5W-40 ATV/UTV Motor Oil. See AMSOIL.com or call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
CK1	EA	1 kit	62.45	83.05
CK2	EA	1 kit	48.40	64.60
CK3	EA	1 kit	60.55	80.55
CK4	EA	1 kit	62.45	83.05
CK5	EA	1 kit	48.40	64.60
CK6	EA	1 kit	60.55	—

TO ORDER: 1-800-777-7094 MONDAY – FRIDAY 7 A.M. – 7 P.M. • AMSOIL.COM

Free shipping on all orders of \$100 (\$130 CAN.) or more.

Orders below \$100 (\$130 Can.) pay a flat shipping rate of \$9.99 (\$12.99 Can.).



Synthetic Motorcycle Oil



STURGIS™




AMSOIL Resists Viscosity Breakdown

AMSOIL V-Twin Motorcycle Oil resists viscosity breakdown **6X better** than Harley-Davidson® SYN3® for **improved protection** against compensator and transmission gear wear.^{BB}

Viscosity Breakdown

% viscosity loss in the CEC L45-KRL, ASTM D445, test

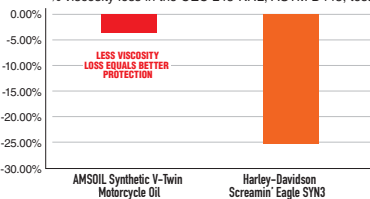

^{BB}Based on testing of AMSOIL 20W-50 Synthetic V-Twin Motorcycle Oil purchased on 3/19/19 and Harley-Davidson Screamin' Eagle SYN3 purchased on 3/19/19 in the CEC L45-KRL, ASTM D445 test. All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



Synthetic V-Twin Motorcycle Oil

● 20W-50

Superior synthetic formulation provides long service life and maximum protection against engine wear in Harley-Davidson*, Buell* and other motorcycle engines, primaries and transmissions.

Use in bikes that require API SG, SL/CF, CG-4 • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MCVQT	EA	1 Quart	12.29	16.09
MCVQT	CA	12 Quarts	139.00	182.95
MCV1G	EA	1 Gallon	48.29	63.29
MCV1G	CA	4 Gallons	182.80	239.95

● SAE 60

Superior synthetic formulation provides long service life and maximum protection against engine wear in big-bore, air-cooled motorcycle engines, including Harley-Davidson Panhead, Shovelhead and Knucklehead.

Use in bikes that require API SG, SL/CF, GL-1 • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MCSQT	EA	1 Quart	11.79	15.19
MCSQT	CA	12 Quarts	134.10	172.20

● 20W-40

Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian* and Victory* motorcycles.

Use in bikes that require API SM • JASO MA • ILSAC GF-4

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MVIQT	EA	1 Quart	12.79	16.89
MVIQT	CA	12 Quarts	145.50	191.80

● 15W-60

Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian and Victory motorcycles.

Use in bikes that require API SM • JASO MA • ILSAC GF-4

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MSVQT	EA	1 Quart	14.79	19.39
MSVQT	CA	12 Quarts	167.25	219.70

● Synthetic V-Twin Transmission Fluid

Helps quiet V-twin transmission noise and enable smooth shifts.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MVTQT	EA	1 Quart	15.09	19.69
MVTQT	CA	12 Quarts	171.75	223.45

● Synthetic V-Twin Primary Fluid

Delivers consistent clutch feel and helps riders easily find neutral.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MVPQT	EA	1 Quart	12.69	16.49
MVPQT	CA	12 Quarts	144.40	186.75

Motorcycle Octane Boost²¹

Increases octane up to three numbers for maximum power and efficiency in motorcycles.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MOBCN	EA	(1) 4-oz. Bottle	4.79	6.49
MOBCN	CA	(12) 4-oz. Bottles	54.15	73.45

V-Twin Oil Change Kits

FITMENT INFO:

HDCK, HDBK: most 1999-2016 Harley-Davidson* motorcycles (HDCK includes chrome filter; HDBK includes black filter).

HDMC, HDMB: most 2017-present Harley-Davidson motorcycles (HDMC includes chrome filter; HDMB includes black filter).

Contains everything needed to perform an oil change on most Harley-Davidson motorcycles, including 20W-50 Synthetic V-Twin Motorcycle Oil, AMSOIL Motorcycle Oil Filter and O-ring.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
HDCK	EA	1 kit	64.45	85.20
HDBK	EA	1 kit	60.75	80.80
HDMC	EA	1 kit	75.85	100.70
HDMB	EA	1 kit	72.00	95.65

Synthetic Metric Motorcycle Oil

● 10W-40

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Can-Am*, Honda*, Yamaha*, Kawasaki*, Triumph*, Suzuki*, BMW* and other motorcycle engines.

Use in bikes that require API SM, SG, SL, CF • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MCFQT	EA	1 Quart	12.19	16.09
MCFQT	CA	12 Quarts	138.70	182.35
MCF1G	EA	1 Gallon	48.19	62.49
MCF1G	CA	4 Gallons	182.40	236.75

● 10W-30

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Honda, Yamaha, Suzuki and Kawasaki motorcycles.

Use in bikes that require API SH, SG, CF • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MCTQT	EA	1 Quart	13.09	17.39
MCTQT	CA	12 Quarts	148.45	196.90

● 15W-50

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Ducati*, BMW, KTM*, Yamaha, Triumph and Royal Enfield* motorcycles.

Use in bikes that require API SM • JASO MA/MA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
MFFQT	EA	1 Quart	14.49	19.39
MFFQT	CA	12 Quarts	164.80	220.30

Motorcycle Oil Filters

Most efficient filters available for the motorcycle and powersports market. Provide excellent 99 percent filtering efficiency at 20 microns. Available in black or chrome (as available).

See AMSOIL.com or call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

²¹See page 47 for Proposition 65 information for this product.

Synthetic Dirt Bike Oil



“Love AMSOIL products. Something I can count on always working even when racing is unpredictable.”

— CAJO
Alpine, Utah

Synthetic Dirt Bike Oil

Delivers confident clutch feel, maximum horsepower and superior wear protection in all types of four-stroke dirt bikes.

10W-40

Use in bikes that require JASO MA • API SG, SJ, SH, SL

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DB40QT	EA	1 Quart	12.69	16.69
DB40QT	CA	12 Quarts	143.60	189.30

10W-50

Use in bikes that require JASO MA • API SG, SJ, SH, SL

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DB50QT	EA	1 Quart	14.19	18.69
DB50QT	CA	12 Quarts	161.15	212.70

10W-60

Use in bikes that require JASO MA • API SG, SJ, SH, SL

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DB60QT	EA	1 Quart	14.69	19.39
DB60QT	CA	12 Quarts	167.00	219.70

Synthetic Dirt Bike Transmission Fluid

Use in two-stroke dirt bike transmissions and the Honda CRF

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
DBTFQT	EA	1 Quart	11.29	15.09
DBTFQT	CA	12 Quarts	128.10	170.95

Shock Therapy® Suspension Fluid

Controls friction, heat, wear, foaming and scuffing in suspension components.

Shock Therapy Suspension Fluid¹³

Lightweight #5

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
STLQT	EA	1 Quart	15.09	19.49
STLQT	CA	12 Quarts	171.65	220.95


Shock Therapy Suspension Fluid¹³

Medium #10

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
STMQT	EA	1 Quart	15.19	19.59
STMQT	CA	12 Quarts	172.20	222.20

AMSOIL delivers confident clutch feel.

AMSOIL provides excellent clutch protection. How good is it? In extreme simulated-start testing, AMSOIL Dirt Bike Oil provided superior wear protection and kept clutch plates looking new.

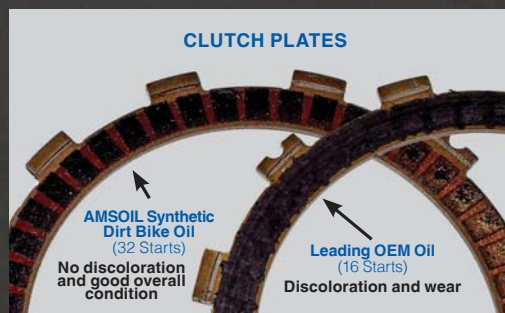

¹³Based on dyno testing of a Honda CRF450 dirt bike using AMSOIL 10W-40 Synthetic Dirt Bike Oil and a leading original equipment manufacturer 10W-40 conventional dirt bike oil.

¹³See page 47 for Proposition 65 information for this product.

Synthetic 4-Stroke Oil



Commercial-Grade Synthetic Oil for Small Engines

AMSOIL Synthetic Small-Engine Oil provides excellent all-season protection and performance in a large variety of small engines:

- Zero-Turn Mowers
- Riding and Push Lawnmowers
- Snowblowers
- Generators
- Pumps
- Welders
- Skid-Steers
- Compressors
- And More



● Formula 4-Stroke® Powersports Synthetic Motor Oil

Specially formulated for four-stroke recreational motors, including ATVs and snowmobiles.

Use in ATVs and snowmobiles that require API SG, SJ, SL/CF • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AFFQT	EA	1 Quart	13.29	17.49
AFFQT	CA	12 Quarts	150.80	198.80

Synthetic Small-Engine Oil

Helps preserve engine power, reduce oil consumption and reduce maintenance in small engines used in severe service.

Use in equipment that requires API SL, SJ, SH, SG • API CF, CD • JASO MA/MA2

○ 5W-30

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AESQT	EA	1 Quart	9.49	12.49
AESQT	CA	12 Quarts	107.15	141.80

● 10W-30

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ASEQT	EA	1 Quart	9.49	12.49
ASEQT	CA	12 Quarts	107.15	141.80
ASE1G	EA	1 Gallon	37.09	—
ASE1G	CA	4 Gallons	140.35	—

● 10W-40

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ASFQT	EA	1 Quart	9.99	13.79
ASFQT	CA	12 Quarts	113.60	156.40
ASF1G	EA	1 Gallon	39.29	—
ASF1G	CA	4 Gallons	148.90	—

● 15W-50

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
SEFQT	EA	1 Quart	8.99	11.79
SEFQT	CA	12 Quarts	101.30	133.60

● 20W-50 Zero-Turn Synthetic Hydrostatic Transmission Fluid¹³

Fights wear to deliver smooth control and responsive power in zero-turn hydrostatic mowers.

Use in hydrostatic transmissions that require 15W-50 or 20W-50 oil recommended for API SM, SL, SJ, SH or SG.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AHFQT	EA	1 Quart	11.99	16.39
AHFQT	CA	12 Quarts	135.45	185.50
AHF1G	EA	1 Gallon	46.99	—
AHF1G	CA	4 Gallons	178.10	—

● Formula 4-Stroke® Synthetic Scooter Oil¹³

Formulated specifically to meet the special needs of today's high-tech air- and water-cooled four-stroke motorized scooters.

Use in scooters that require API SG, SL/CF • JASO MA/MA2 • ISO-L-EMA2

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ASOQT	EA	1 Quart	10.89
ASOQT	CA	12 Quarts	123.55

● Semi-Synthetic Bar and Chain Oil¹⁷

Delivers excellent lubrication and protection, helping extend the life of bar and chain applications.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ABCQT	EA	1 Quart	6.59	8.69
ABCQT	CA	12 Quarts	74.10	98.75
ABC1G	EA	1 Gallon	25.59	—
ABC1G	CA	4 Gallons	96.70	—

^{13,17} See page 47 for Proposition 65 information for this product.

TO ORDER: 1-800-777-7094 MONDAY – FRIDAY 7 A.M. – 7 P.M. • AMSOIL.COM

Free shipping on all orders of \$100 (\$130 CAN.) or more.

Orders below \$100 (\$130 Can.) pay a flat shipping rate of \$9.99 (\$12.99 Can.).



Synthetic 2-Stroke Oil



SABER Professional Fights Carbon

Equipment using SABER Professional was
96% carbon-free^N.



Leading OEM oil after 300 hours



AMSOIL SABER Professional
after 300 hours

^NBased on spark-arrestor testing.



Runs On Freedom™ Limited Snowmobile Warranty

Use AMSOIL INTERCEPTOR® Synthetic
2-Stroke Oil exclusively in your current-
model-year or newer sled and we'll cover
engine repairs in the unlikely event of any
engine breakdown for up to two years/5,000
miles/8,000 km.*

*To get details and register, visit AMSOIL.com/rof/warranty.





AIO



● Synthetic 2-Stroke Injector Oil¹³

High-quality, cost-effective oil for the severe operating conditions of two-stroke snowmobiles and outboard motors. Ideal for vintage sleds.

Use in snowmobiles and boat motors that require TC-W3 • API TC

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AIOQT	EA	1 Quart	9.79	12.89
AIOQT	CA	12 Quarts	110.65	146.25
AIO1G	EA	1 Gallon	38.49	49.89
AIO1G	CA	4 Gallons	145.85	189.10

AIT



● INTERCEPTOR® Synthetic 2-Stroke Oil¹³

Purpose-built, best-in-class performance for piston protection, cold-temperature pumpability and exhaust power valve cleanliness. Use in snowmobiles, including those made by Ski-Doo®, Polaris® and Arctic Cat®.

Use in snowmobiles that require API TC

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AITQT	EA	1 Quart	12.39	16.39
AITQT	CA	12 Quarts	140.80	185.50
AIT1G	EA	1 Gallon	48.89	63.19
AIT1G	CA	4 Gallons	185.20	239.50

TDR



● DOMINATOR® Synthetic 2-Stroke Racing Oil¹³

Delivers outstanding wear protection in high-horsepower and modified racing applications, including snowmobiles, motorcycles, ATVs, personal watercraft, go-carts and outboard motors.

Use in snowmobiles that require API TC

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
TDRQT	EA	1 Quart	13.39	17.59
TDRQT	CA	12 Quarts	151.30	199.40
TDR1G	EA	1 Gallon	52.59	67.79
TDR1G	CA	4 Gallons	199.20	257.00

ATP



● SABER® Professional Synthetic 2-Stroke Oil¹³

Provides superior protection for handheld two-stroke equipment at any mix ratio up to 100:1, offering the ultimate in convenience.

Use in power equipment that requires ISO-L-EGD • API TC • JASO FD

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ATPPK	EA	(1) 1.5-oz. Pillow Pack	1.39	-
ATPPK	CA	(48) 1.5-oz. Pillow Packs	59.95	-
ATPTS	EA	(1) 2.6-oz. Bottle	2.29	-
ATPTS	CA	(12) 2.6-oz. Bottles	25.20	-
ATPBA	EA	(1) 3.5-oz. Bottle	2.49	-
ATPBA	CA	(12) 3.5-oz. Bottles	27.85	-
ATPSF	EA	(1) 6.4-oz. Bottle	3.89	5.49
ATPSF	CA	(12) 6.4-oz. Bottles	44.35	61.45
ATPBC	EA	(1) 8-oz. Bottle	4.79	6.09
ATPBC	CA	(12) 8-oz. Bottles	54.35	68.40
ATPTE	EA	(1) 12.8-oz. Bottle	7.49	-
ATPTE	CA	(12) 12.8-oz. Bottles	84.80	-
ATPQT	EA	1 Quart	13.29	16.89
ATPQT	CA	12 Quarts	150.15	191.20
ATP1G	EA	1 Gallon	52.19	-
ATP1G	CA	4 Gallons	197.65	-

TCC



○ Synthetic Chaincase & Gear Oil

Superior protection for enclosed chains and gears found in snowmobiles, ATVs, UTVs and general equipment.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
TCCCN	EA	(1) 16-oz. Bottle	10.59	13.89
TCCCN	CA	(6) 16-oz. Bottles	60.05	78.85

¹³See page 47 for Proposition 65 information for this product.

TO ORDER: 1-800-777-7094 MONDAY – FRIDAY 7 A.M. – 7 P.M. • AMSOIL.COM

Free shipping on all orders of \$100 (\$130 CAN.) or more.

Orders below \$100 (\$130 Can.) pay a flat shipping rate of \$9.99 (\$12.99 Can.).



Synthetic Marine Oil



"Switched my marine big block over to AMSOIL 25W-40 and have seen better oil pressure and increased performance over 30W oil. I'll definitely use this oil again."

— **Runky**
Portsmouth, RI

WCT



WCF



WCM



HPM



ATO



AGM



Synthetic Marine Engine Oil

Formulated specifically for use in four-stroke gasoline-fueled engines used in marine applications.

10W-30¹³

Use in boat motors that require API SM • NMMA FC-W Catalyst Compatible (Registration #FC-00833T) • JASO MA

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
WCTQT	EA	1 Quart	11.39	14.99
WCTQT	CA	12 Quarts	128.90	170.30

10W-40¹³

Use in boat motors that require API SM • NMMA FC-W Catalyst Compatible (Registration #FC-00850T) • JASO MA

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
WCFQT	EA	1 Quart	12.39	16.39
WCFQT	CA	12 Quarts	140.05	185.50

25W-40 (Synthetic Blend)²³

Use in boat motors that require API SM • NMMA FC-W Catalyst Compatible (Registration #FC-11825T) • JASO MA

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
WCMQT	EA	1 Quart	9.59	12.99
WCMQT	CA	12 Quarts	109.10	147.50

HP Marine® Synthetic 2-Stroke Oil¹³

Prevents piston skirt scuffing, cylinder bore scuffing and ring sticking in all two-stroke outboard motors, personal watercraft and anywhere NMMA TC-W3 and API-TC oils are specified.

Use in boat motors that require TC-W3

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
HPMQT	EA	1 Quart	10.69	13.99
HPMQT	CA	12 Quarts	120.75	158.90
HPM1G	EA	1 Gallon	41.89	53.89
HPM1G	CA	4 Gallons	158.50	204.25

Outboard 100:1 Pre-Mix Synthetic 2-Stroke Oil¹³

Contains a heavy dose of low-temperature dispersant additives that excel at reducing varnish and carbon deposit formation in water-cooled outboard motors.

Use in boat motors that require TC-W3

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ATQBC	EA	(1) 8-oz. Bottle	5.09
ATQBC	CA	(12) 8-oz. Bottles	57.50
ATOQT	EA	1 Quart	14.79
ATOQT	CA	12 Quarts	168.05

Universal Synthetic Marine Gear Lube¹⁸

Resists foam and retains extreme-pressure qualities in outboard lower units, stern drives, V-drives, bow and tunnel thrusters and marine transmissions. Delivers advanced outboard protection against power loss and gear wear, even with up to 15 percent water contamination.^Y Choose the easy-pack for fast, easy installation.

Use in applications that require GL-5, GL-4

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AGMTB	EA	(1) 10-oz. Tube	7.39	9.69
AGMTB	CA	(6) 10-oz. Tubes	41.55	54.80
AGMQT	EA	1 Quart	13.39	17.69
AGMQT	CA	12 Quarts	152.40	201.30
AGMPK	EA	1 Quart Easy-Pack	15.09	19.99
AGMPK	CA	12 Quart Easy-Packs	171.65	226.65

Marine Gear Lube Pump²⁷

Specifically designed to ease installation and reduce mess when servicing lower units. Eliminate the need for a pump, save money and reduce the mess by choosing the easy-pack.

STOCK#	U.S. P.C.	CAN. P.C.
G3456	10.10	13.40

^{13,23,18,27}See page 47 for Proposition 65 information for this product.

^YBased upon AMSOIL testing of AMSOIL Synthetic Marine Gear Lube 75W-90 in ASTM 3233 and ASTM D892.

TO ORDER: 1-800-777-7094 MONDAY – FRIDAY 7 A.M. – 7 P.M. • AMSOIL.COM

Free shipping on all orders of \$100 (\$130 CAN.) or more.

Orders below \$100 (\$130 Can.) pay a flat shipping rate of \$9.99 (\$12.99 Can.).



Cleaners and Protectants



Protection and Dependability
for Generations



Chain Lube

Provides outstanding protection against wear and corrosion. Helps extend chain life. Does not attract dirt and does not fling off. Fast-drying.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ACL4SC	EA	(1) 4.5-oz. Spray Can	6.29
ACL4SC	CA	(12) 4.5-oz. Spray Cans	71.35
ACLSC	EA	(1) 11-oz. Spray Can	11.89
ACLSC	CA	(6) 11-oz. Spray Cans	67.30

Engine Fogging Oil¹³

Helps prevent corrosion and dry starts to internal engine components found in outboard motors, lawn and garden equipment, motorcycles, snowmobiles, ATVs, motor homes and generators during storage or long periods of inactivity.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
FOGSC	EA	(1) 12-oz. Aerosol Can	9.69
FOGSC	CA	(12) 12-oz. Aerosol Cans	109.65

Power Foam®

Improves starting and performance by cleaning dirty intake systems and spark plugs; freeing sticky valves and removing gum, varnish and carbon deposits.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
APFSC	EA	(1) 18-oz. Spray Can	9.79
APFSC	CA	(12) 18-oz. Spray Cans	111.45

Heavy-Duty Degreaser

Formulated with powerful and fast-acting solvents, attacking petroleum-based grime on a molecular level to loosen its hold on metal, concrete and other surfaces.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ADGSC	EA	(1) 15-oz. Spray Can	12.69
ADGSC	CA	(12) 15-oz. Spray Cans	144.35

Silicone Spray²⁶

Perfect for lubricating or protecting rubber, nylon, plastics, upholstery, vinyl, wood, cardboard or fiberglass. Also excellent for waterproofing leather products. Hundreds of household uses.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
ALSSP	EA	(1) 10-oz. Spray Can	9.19
ALSSP	CA	(12) 10-oz. Spray Cans	104.00

^{13,26} See page 47 for Proposition 65 information for this product.



Mudslinger®

Provides a protective layer of armor against the accumulation of mud, dirt and snow on ATVs, UTVs and dirt bikes, easing clean-up. Restores color and luster.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
AMSSC	EA	(1) 12-oz. Spray Can	9.89
AMSSC	CA	(12) 12-oz. Spray Cans	111.50

Engine Degreaser

Effectively cleans engine surfaces by cutting through grease, oil and grime.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
AEDSC	EA	(1) 15-oz. Spray Can	8.19
AEDSC	CA	(12) 15-oz. Spray Cans	92.75

Glass Cleaner

Cuts through grease and grime faster than other leading glass cleaners, stays where you spray it and leaves no streaks.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
AGCSC	EA	(1) 19-oz. Spray Can	4.69
AGCSC	CA	(12) 19-oz. Spray Cans	52.40

Metal Protector¹³

Displaces water, lubricates, penetrates and protects metal surfaces from corrosion, including hinges, squeaky mechanical objects, electrical systems and more.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AMP4SC	EA	(1) 4-oz. Spray Can	6.29	—
AMP4SC	CA	(12) 4-oz. Spray Cans	71.15	—
AMPSC	EA	(1) 8.75-oz. Spray Can	8.19	8.49
AMPSC	CA	(12) 8.75-oz. Spray Cans	92.75	95.60

Heavy-Duty Metal Protector¹³

Penetrates and adheres to metal surfaces, leaving a long-lasting coating that protects against the damaging effects of salt, moisture or chemical corrosion.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
AMHSC	EA	(1) 15-oz. Spray Can	11.69
AMHSC	CA	(12) 15-oz. Spray Cans	132.65



Engine and Transmission Flush

Helps restore operating efficiency, increase fuel economy and reduce emissions in gasoline and diesel engines and automatic transmissions.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
FLSHCN	EA	(1) 16-oz. Bottle	11.29	14.69
FLSHCN	CA	(12) 16-oz. Bottles	128.05	167.15

Miracle Wash® Waterless Wash & Wax

Unique dry car wash and polish delivers outstanding performance and quick, easy and economical spray application. No water required.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
AMWSC	EA	(1) 13-oz. Spray Can	10.29
AMWSC	CA	(12) 13-oz. Spray Cans	116.20

Synthetic Firearm Lubricant and Protectant

Effectively lubricates and protects firearms, helping extend life and prevent blockage, jams and wear. Outstanding protection and performance in both hot and cold climates. Specifically formulated for firearms, offering superior performance over multi-purpose products.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
FLPBA	EA	(1) 4-oz. Bottle	8.99	12.09
FLPBA	CA	(12) 4-oz. Bottles	101.75	137.40
FLPSC	EA	(1) 5-oz. Spray Can	11.09	—
FLPSC	CA	(12) 5-oz. Spray Cans	125.55	—

Firearm Cleaner and Protectant

Penetrates deep into hard-to-reach components, effectively cleaning fouling and powder residue from all firearm surfaces, safely protecting them for storage, reducing jamming and increasing reliability. Protects against corrosion, allowing for safe storage and preserving performance, reliability and value.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
FCPSC	EA	(1) 5-oz. Spray Can	7.59
FCPSC	CA	(12) 5-oz. Spray Cans	86.35
FCPCN	EA	(1) 8-oz. Bottle	10.19
FCPCN	CA	(12) 8-oz. Bottles	114.95

¹³See page 47 for Proposition 65 information for this product.



● Heavy-Duty Antifreeze & Coolant²⁹

Provides superior heat transfer and excellent protection against corrosion, cylinder-liner cavitation, freezing and boilover. Protection up to 1,000,000 miles (1,609,344 km), 20,000 hours or 8 years, whichever comes first. Pre-mixed formula.

Use in applications requiring any of the following specifications: STM D3306, D6210, D7583, D7820 • TMC RP329B, TMC RP338 • AS/NZS 2108.2004 Type A

Suitable for use with the following: Case New Holland • Cummins 14603 • Cummins 3666132 • DDC 7SE 298, 93K217 • Freightliner 48-22880 • GM Heavy Truck • International Truck and Engine / Navistar CEMS B-1 Type III-A • JIS K2234 • MAN 324 NF • MB DBL 7700 • MTU MTL 5048 • Kenworth R026-170-97 • Mack 014GS17004, 014GS17009 • PACCAR CS0185 • DAF MAT 74002 • Peterbilt 8502.002 • Scania TB1451 • Volvo Heavy Truck

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ANTHD1G	EA	1 Gallon	20.59	26.79
ANTHD1G	CA	4 Gallons	77.90	101.50

○ Propylene Glycol Antifreeze & Coolant

All-climate protection for up to 150,000 miles (241,400 km) or 5 years, whichever comes first, in passenger cars and light trucks. Protection up to 1,000,000 miles (1,609,344 km), 20,000 hours or 8 years, whichever comes first, in heavy-duty applications. Concentrated formula.

Use in applications requiring any of the following specifications: ASTM D3306, D6210, D7583, D7820 • TMC RP329B, TMC RP338 • AS/NZS 2108.2004 Type A

Suitable for use with the following: Case New Holland • Cummins 14603 • Cummins 3666132 • DDC 7SE 298, 93K217 • Freightliner 48-22880 • GM Heavy Truck • International Truck and Engine / Navistar CEMS B-1 Type III-A • JIS K2234 • MAN 324 NF • MB DBL 7700 • MTU MTL 5048 • Kenworth R026-170-97 • Mack 014GS17004, 014GS17009 • PACCAR CS0185 • DAF MAT 74002 • Peterbilt 8502.002 • Scania TB1451 • Volvo Heavy Truck

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ANT1G	EA	1 Gallon	44.99	59.09
ANT1G	CA	4 Gallons	170.50	223.90

● Passenger Car/Light Truck Antifreeze & Coolant²⁹

Engineered to exceed original equipment manufacturer (OEM) requirements for up to 150,000 miles (241,400 km) or 5 years, whichever comes first, in passenger cars and light trucks. Pre-mixed formula.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
ANTPC1G	EA	1 Gallon	19.29	25.09
ANTPC1G	CA	4 Gallons	73.05	94.95

Fluid Extraction Pump

STOCK#	U.S. P.C.	CAN. P.C.
G2576	15.75	21.00

Aids in the removal of old fluids when servicing vehicles.



^{29, 15, 13} See page 47 for Proposition 65 information for this product.



Powersports Antifreeze & Coolant¹⁵

Advanced design helps control operating temperature in hot-running, high-revving powersports applications. Extended-life formula provides all-season protection for up to five years.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
PSAFQT	EA	1 Quart	7.59	10.19
PSAFQT	CA	12 Quarts	85.50	115.25

DOMINATOR® Coolant Boost

Helps reduce engine temperatures, increase horsepower, promote faster engine warm-up times and reduce radiator and engine corrosion in racing and passenger vehicles.

Warm up your car 54% faster. See the Coolant Boost product page at AMSOIL.com for details.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
RDCBCN	EA	(1) 16-oz. Bottle	11.49	15.49
RDCBCN	CA	(6) 16-oz. Bottles	65.00	87.70

○ Synthetic Air Tool Oil¹³

Effectively lubricates rotary and piston-type air-tool bearings and motors, while managing moisture and conditioning rubber and plastic seals and O-rings.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
AIRBA	EA	(1) 4-oz. Bottle	3.99	5.49
AIRBA	CA	(12) 4-oz. Bottles	45.45	62.05

Multi-Vehicle Synthetic Power Steering Fluid¹³

Provides excellent wear protection, long component life and quiet operation in most passenger cars and light trucks.

Use in applications that require American Motor Corporation C 4124; 4634 • BMW 82 11 0 148 132; 83 29 0 429 576; 81 22 1 468 879 & 82 11 1 468 041 • Chrysler MS-1872; MS-5931, MS-9602 & MS-11655 • Ford M2C138-CJ; ESW-M2C128-C&D; M2C195-A; M2C204-A & M2C33-F • GM/Saginaw PSF 9985010; 9985835; 89021184 & 1050017 • Hyundai/Kia PSF-3; PSF-4 & PSF 00232-19017 • Mercedes Benz 236.3; 345.0; 001 989 24 03 10; 001 989 24 03 12 & Q 1 32 0001 • Mitsubishi Diamond SP III & PS Fluid • Navistar TMS 6810 • Nissan PSF-II • Porsche 000 043 206 56 • Saab 93160548; (45) 30 09 800 & 30 32 380 • Subaru K0209A0080 • Toyota PSF Type EH; P/N 008886-01 • Volvo 1161529 & 30741424 • VW/Audi TL-52146; G002000; G 004 000 M2; G 004 000 M7 & G 004 000 M8

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
PSFCN	EA	(1) 16-oz. Bottle	8.39	10.79
PSFCN	CA	(12) 16-oz. Bottles	94.70	122.20



DOT 3 & 4 Synthetic Brake Fluid³³

High-performance brake fluid specially designed as a multi-use product for passenger-car, light-truck and powersports applications.

Use in equipment requiring a DOT 3, 4 or 5.1 brake fluid.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
BFLVCN	EA	(1) 12-oz. Bottle	6.69
BFLVCN	CA	(12) 12-oz. Bottles	75.95

DOMINATOR® DOT 4 Synthetic Racing Brake Fluid¹⁰

High boiling point brake fluid engineered to resist brake fade and vapor lock during intense racing applications.

Use in racing equipment requiring a DOT 4 brake fluid.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
BFRCN	EA	(1) 12-oz. Bottle	12.49
BFRCN	CA	(12) 12-oz. Bottles	141.25

Brake & Parts Cleaner³²

Professional-strength parts cleaner that quickly removes oil, grease, brake fluid and other contaminants from brake parts and other automotive components.

STOCK#	UNITS	PKG./SIZE	U.S. P.C.
BPCSC	EA	(1) 19-oz. Spray Can	6.09
BPCSC	CA	(12) 19-oz. Spray Cans	68.35

Synthetic Compressor Oil

Superior protection for rotary screw, rotary vane, reciprocating and other compressor applications.

● Synthetic Compressor Oil¹³

Use in compressors that require ISO 46 • SAE 20

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
PCIQT	EA	1 Quart	13.99	17.69
PCIQT	CA	12 Quarts	158.25	200.70

● Synthetic Compressor Oil

Use in compressors that require ISO 100 • SAE 30/40

STOCK#	UNITS	PKG./SIZE	U.S. P.C.	CAN. P.C.
PCKQT	EA	1 Quart	14.29	18.09
PCKQT	CA	12 Quarts	161.95	205.75

^{33,10,32,13} See page 47 for Proposition 65 information for this product.

CALIFORNIA PROPOSITION 65 WARNING STATEMENTS

- 10 ⚠ WARNING:** This product can expose you to 2,2'-Iminodiethanol, which is known to the State of California to cause cancer, and Ethanediol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 13 ⚠ WARNING:** This product can expose you to Benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 15 ⚠ WARNING:** This product can expose you to Ethanediol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 17 ⚠ WARNING:** This product can expose you to Ethylbenzene, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- 18 ⚠ WARNING:** This product can expose you to Ethylene oxide, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 19 ⚠ WARNING:** This product can expose you to Naphthalene, which is known to the State of California to cause cancer, and Methanol which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 21 ⚠ WARNING:** This product can expose you to Naphthalene, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- 23 ⚠ WARNING:** This product can expose you to Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 25 ⚠ WARNING:** This product can expose you to Ethylbenzene, which is known to the State of California to cause cancer, and Methanol which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 26 ⚠ WARNING:** This product can expose you to n-Hexane, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 27 ⚠ WARNING:** This product can expose you to Di(2-ethylhexyl)phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 28 ⚠ WARNING:** This product can expose you to Ethylbenzene, which is known to the State of California to cause cancer, and Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 29 ⚠ WARNING:** This product can expose you to Ethylene Glycol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 31 ⚠ WARNING:** This product can expose you to Benzene and Lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 32 ⚠ WARNING:** This product can expose you to Tetrachloroethylene, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- 33 ⚠ WARNING:** This product can expose you to Diethanolamine, which is known to the State of California to cause cancer, and 2-Methoxyethanol, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.
- 35 ⚠ WARNING:** This product can expose you to chemicals including Crystalline Quartz Silica, Naphthalene and Ethylbenzene, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- 36 ⚠ WARNING:** This product can expose you to chemicals including Crystalline Quartz Silica and Naphthalene, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- 37 ⚠ WARNING:** This product can expose you to chemicals such as lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

TO ORDER: 1-800-777-7094 MONDAY – FRIDAY 7 A.M. – 7 P.M. • AMSOIL.COM

Free shipping on all orders of \$100 (\$130 CAN.) or more.

Orders below \$100 (\$130 Can.) pay a flat shipping rate of \$9.99 (\$12.99 Can.).





CHANGE SERVICE REQUESTED

Published 4 times annually

PRSR STD
US POSTAGE
PAID
AMSOIL

ISO 9001/ISO 14001 REGISTERED

Donaldson
Filtration Solutions

WIX
FILTERS

MANN
FILTER

WE HONOR



(Discover in U.S. only)

Fall hunting season is right around the corner. AMSOIL products help ensure your vehicles and firearms are well-protected and operating at peak performance. AMSOIL.com



Minimum 10%
Post-Consumer Fiber


AMSOIL INC., 925 Tower Ave., Superior, WI 54880 • 715-392-7101 • Printed in the USA
© 2023, AMSOIL INC. All rights reserved. The AMSOIL logo is a registered trademark of AMSOIL INC.

AMSOIL.com

Fall 2023

Look **Under the Hood** of Preferred Customer Membership with Your MyRewards Page

The MyRewards page is a one-stop shop for Preferred Customers.

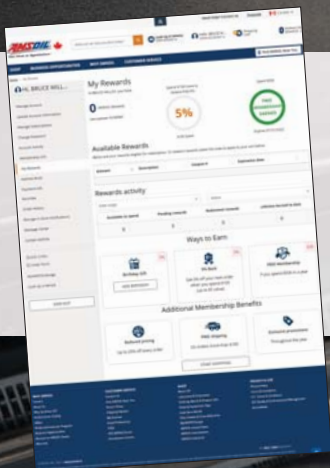

- **Track** earned, pending and expired rewards
- **Use** rewards with the click of a button
- **See** how close you are to your next \$5 reward
- **Track** progress toward free membership renewal
- **Enter** your birthday month to receive your gift from AMSOIL
- **And more**

Log into your MyRewards

Become an AMSOIL Preferred Customer

ca (Canada) to get started.